


反向-阀门-板 **CETOP 5**
 (夹板) 在 **P**
RZ-10S-P







标识:

额定压力:
 350 bar
 额定流量:
 50 l/min.



IMAV-Hydraulik GmbH
 Breite Strasse 10
 D-40670 Meerbusch (Osterath)
 电话 +49 (0)2159 - 9188.0
 传真 +49 (0)2159 - 4242
 邮件: info@imav.com
 互联网: <http://www.imav.com>

IZ-110-400-00
 (若有变更, 恕不另行通知)

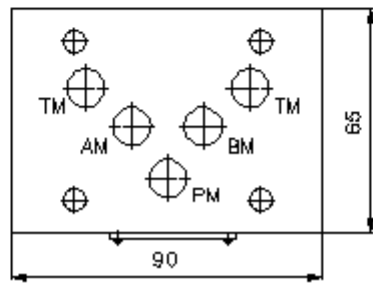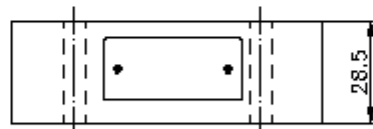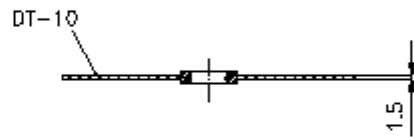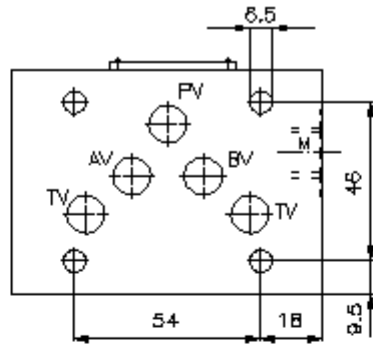

反向-阀门-板 **CETOP 5**
(夹板) 在 **P**
RZ-10S-P



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
电话 +49 (0)2159 - 9188.0
传真 +49 (0)2159 - 4242
邮件: info@imav.com
互联网: <http://www.imav.com>

IZ-110-400-00
(若有变更, 恕不另行通知)

订货样例:

RZ - 10S - P
| | |
A **B** **C**

货号:

- | | |
|--|--|
| <p>A 产品设计
单向阀板
DIN 24340 A型钻孔图
夹板建造方式</p> | <p>B 设计大小和制作材料
10S = 钢 (9SMnPb28K 以及 GGG-40)</p> <p>C 执行功能
P = P道单向阀</p> |
|--|--|

技术参数:

额定压力:	350 bar
额定流量:	50 l/min
重量:	1,1 kg
开口压力:	0.2 - 0.3 巴
自由流向:	参见示意图
供货范围包括:	DT-10 = 配有硫化O型圈的密封架 (Viton FPM)