


**pressure sequence valve CETOP 5
(sandwich plate) in B,pilot operat.
DFVZ-10A-BVP./..**



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Phone +49 (0)2159 - 9188.0
Fax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

 **Symbol:**




Nom. pressure:
250 bar

Nominal flow:
60 l/min.

IZ-450-451-00

(Subject to change!)

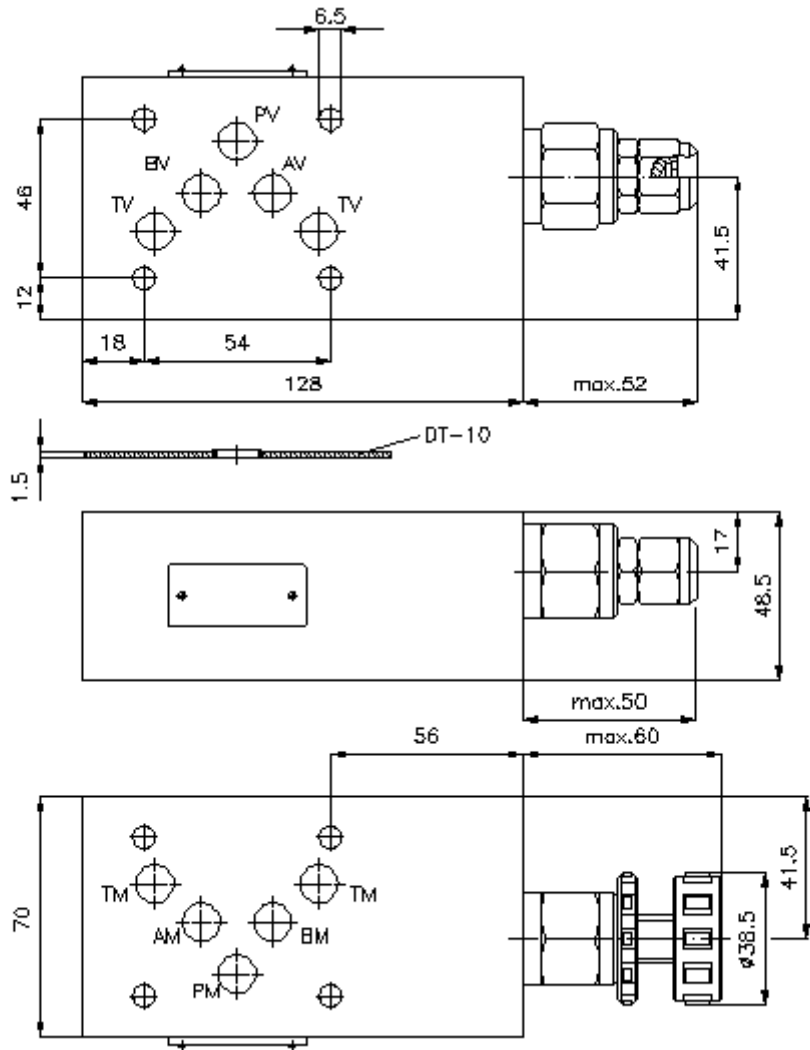

**pressure sequence valve CETOP 5
(sandwich plate) in B,pilot operat.
DFVZ-10A-BVP./..**



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Phone +49 (0)2159 - 9188.0
Fax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-450-451-00

(Subject to change!)

Ordering example:

DFVZ - 10A - B VP C / 30
| | | | | |
A B C D E F

Model code:

- | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>A design
pressure-sequence-valve
adjustable
pilot operated
with free reverse flow
poppet type valve
with mounting interface DIN 24340 form A
sandwichplate design</p> <p>B size and material
10A = aluminum (F37)</p> | <p>C function mode
B = in B acting (return flow)</p> <p>D pressure sequence valve
VP = PSVP-10.-.. (pilot operated) see data
sheet no.: CP-315-101-00</p> <p>E adjustment
C = cap
K = handknob</p> <p>F pressure range (PSPP)
15 = 3.4 - 105 bar
30 = 3.4 - 210 bar
50 = 3.4 - 350 bar</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Technical Data:

- note:** Concernig the flow direction (return and supply) it is important to review the mounting position (port "1" and "2"). Rotating around the lateral axis the flow direction of all variants will change: e.g. from port "1" to port "2" will change to port "2" to port "1", or vice versa, and the channel A will change to B and B to A (see symbol).
- nominal pressure:** 250 bar
- nominal flow:** 60 l/min
- weight:** 1.8 kg
- pressure sequence valve:** PSVP-10.-.. see datasheet no. [CP-315-101-00](#)
- included:** DT-10 = sealing plate with vulcanized O-ring (Viton FPM)