


**relief valve CETOP 5
(sandwich plate) in B,pilot operat.
VSZ-10.-BPP./..**



Symbol:

Nom. pressure:
350 bar


Nominal flow:
95 l/min.



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Phone +49 (0)2159 - 9188.0
Fax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-510-451-00

(Subject to change!)

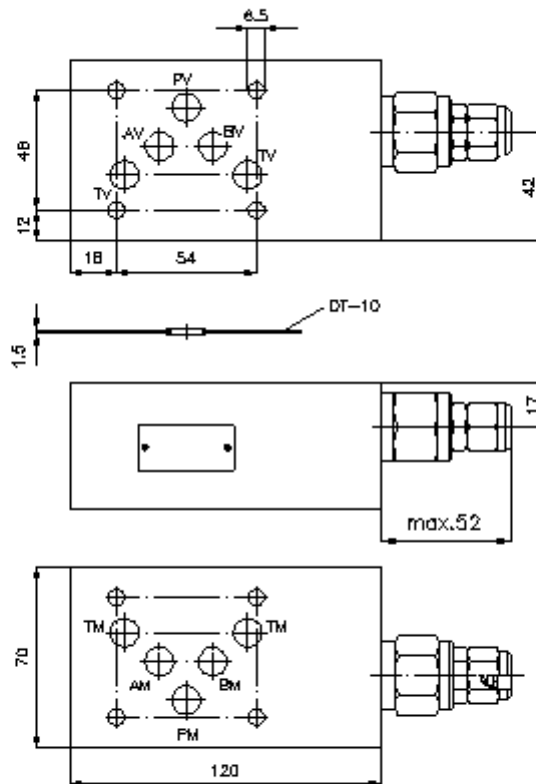

**relief valve CETOP 5
(sandwich plate) in B,pilot operat.
VSZ-10.-BPP./..**



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Phone +49 (0)2159 - 9188.0
Fax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-510-451-00

(Subject to change!)

Ordering example:

VSZ - 10A - B PP C / 30
| | | | |
A **B** **C** **D** **E** **F**

Model code:

- | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>A design
backpressure valve
adjustable
pilot operated
poppet type valve
with mounting interface DIN 24340 form A
sandwichplate design</p> <p>B size and material
10A = aluminum (F37)
10S = steel (9SMnPb28K resp. GGG-40)</p> | <p>C function mode
B = in B acting</p> <p>D relief valve
PP = RVPP-10.-.. (pilot operated) see data
sheet no.: CP-130-101-00</p> <p>E adjustment
C = cap</p> <p>F pressure range
15 = 3.4 - 105 bar
30 = 3.4 - 210 bar
50 = 3.4 - 350 bar</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Technical Data:

nominal pressure: 250 bar (A)
350 bar (S)

nominal flow: 95 l/min

weight: 1.8 / 3.4 kg (A/S)

relief valve: RVPP-10.-.. see datasheet no. [CP-130-101-00](#)

included: DT-10 = sealing plate with vulcanized O-ring (Viton FPM)