


**trograni prop. regulator protoka
uvrtni ventil
EPFD-16.-...-0-.....**



Simbol

Nazivni pritisak
350 bar

Nazivni protok
75 l/min





IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

CF-920-161-00
(Promjene nisu isključene!)

promjer ključa 1
1/2"

izvrtina:
C-16-3
vidi
stranicu broj:
IK-300-169-00

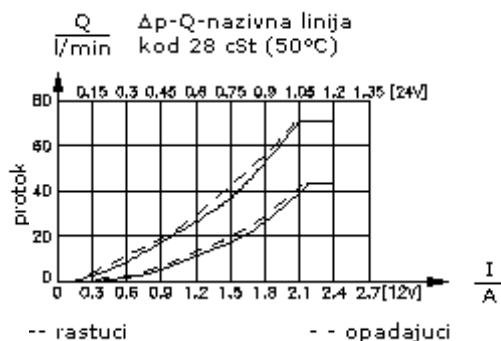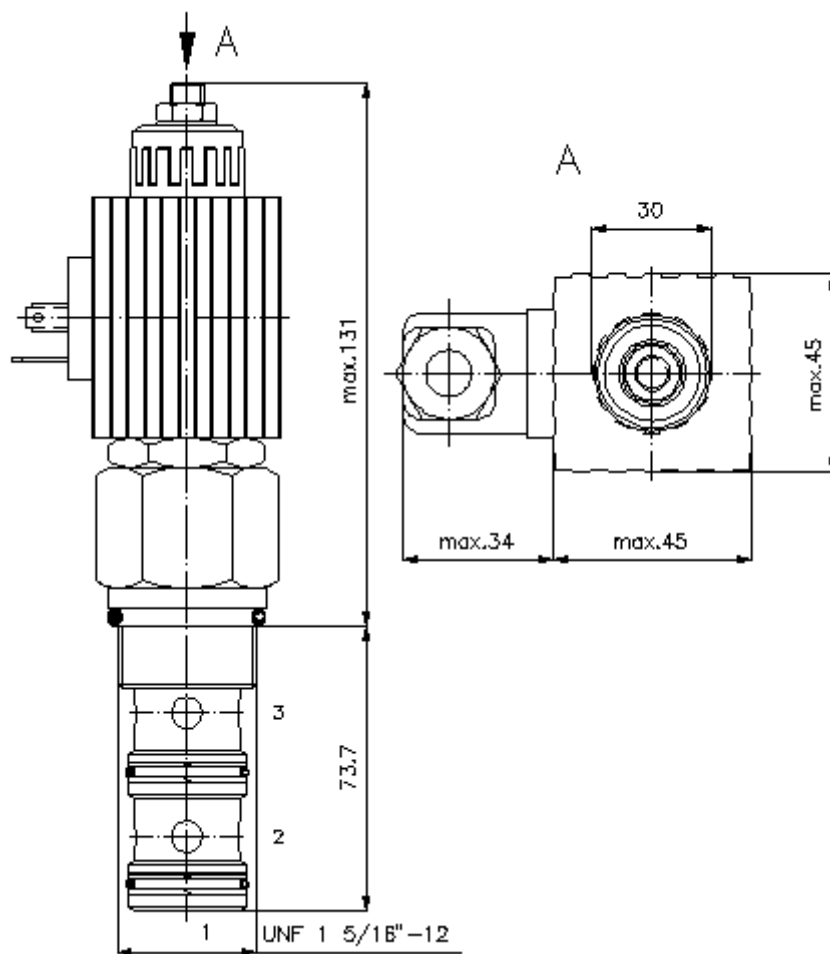

**trograni prop. regulator protoka
uvrtni ventil
EPFD-16.-...-0-.....**



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

CF-920-161-00

(Promjene nisu isključene!)

Primjer za porudzbu

EPFD - 16N - 05 - 0 - 024D G
| | | | | |
A **B** **C** **D** **E** **F**

Kljuc

- | | |
|--|--|
| <p>A izvedba
proporcionalni prioritetni regulator protoka
pritisak kompenziran
pokretni ventil
sa rucicom za nuzno aktiviranje</p> <p>B velicina i zaptivac
16N = Buna (NBR)
16V = viton (FPM)</p> <p>C regulirani pritisak
05 = 0 - 19 l/min
10 = 0 - 38 l/min
15 = 0 - 57 l/min
20 = 0 - 76 l/min</p> | <p>D konstrukcija
0 = uvrtni ventil</p> <p>E napon
012D = 12V DC
024D = 24V DC</p> <p>F elektricni prikljucak
G = DIN 43650 konektor, drugi konektori
vidi stranicu broj: CS-010-000-00</p> |
|--|--|

Tehnicke informacije

- | | |
|------------------------------|---|
| nazivni pritisak: | 350 bar |
| nazivni protok: | 75 l/min |
| tezina: | 1,2 kg |
| podrucje temperature: | -40°C do 120°C |
| medium: | hidraulicno ulje po DIN 51524 T1 (ISO TC 131) |
| max. curenje: | 330 ccm/min kod 22 cSt (50°C) i 350 bar |
| opcija: | opcionalno Buna (NBR) ili Viton (FPM), kao i teflon metalni prsten (PTFE) |
| histereza: | ca. 1,8 l/min |
| apsorbovanje snage: | 29 W |
| upravljacka struja: | 0.2 - 2.4 Amp. kod 12 V DC
0.1 - 1.2 Amp. kod 24 V DC |
| uvrtina: | C-16-3 vidi stranicu broj: IK-300-169-00 |
| kuciste: | 3LH-16.-B..vidi stranicu broj IH-300-000-00 |
| komplet zaptivaca: | SP-CDS-16N-34 (EHPFD) (NBR), SP-CDS-16V-34 (EHPFD) (FPM) |