

4/2 magnetni razvodnik sa lezistem ventil


EMDV-12.-4A-0-.....



Simbol

Nazivni pritisak
350 bar

Nazivni protok
60 l/min





IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

CS-710-121-00

(Promjene nisu isključene!)

promjer ključa 1
5/16"

izvrtina:
C-12-4
vidi
stranicu broj:
IK-400-129-00

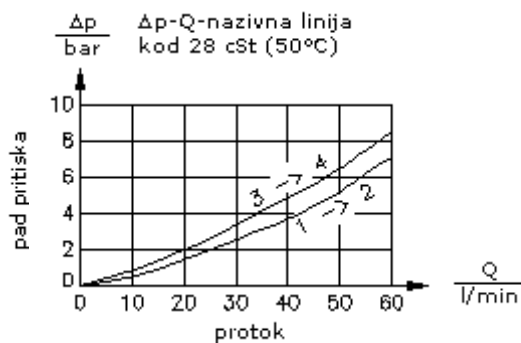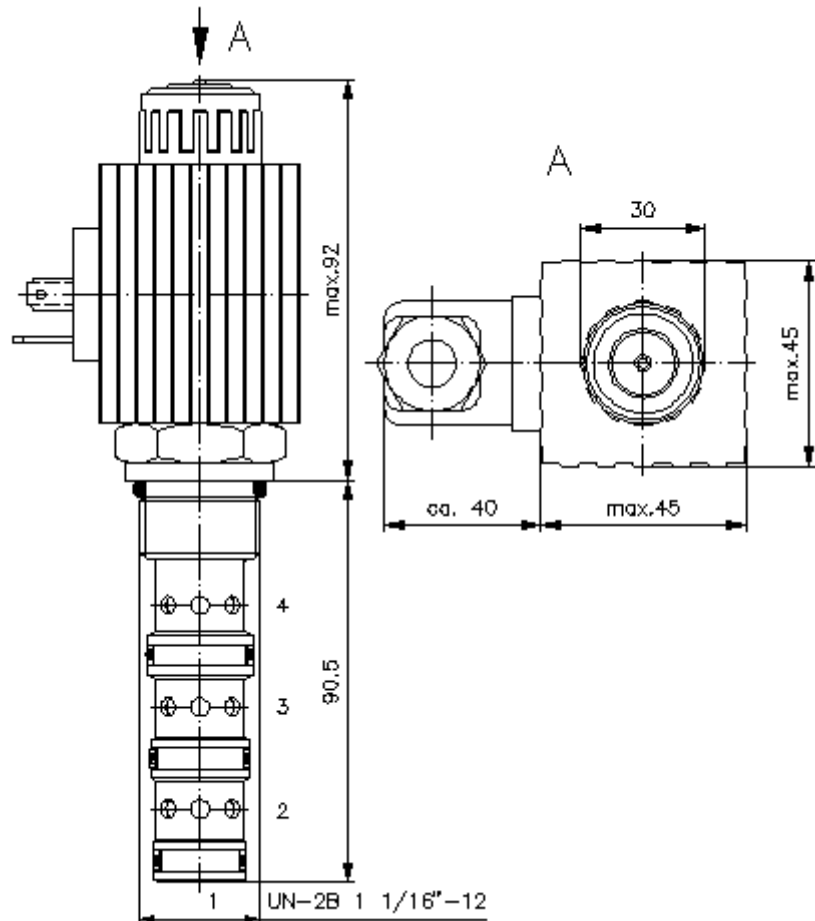

4/2 magnetni razvodnik sa lezistem ventil

EMDV-12.-4A-0-.....

Primjer za porudzbu

EMDV - 12N - 4A - 0 - 024D G

A	B	C	D	E	F



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

CS-710-121-00

(Promjene nisu isključene!)

Kljuc

- | | |
|--|--|
| <p>A izvedba
magnetni ventil
pokretni ventil
direktno upravljani
sa rucicom za nuzno aktiviranje</p> <p>B velicina i zaptivac
12N = buna (NBR)
12V = viton (FPM)</p> <p>C simbol
4 = 4/2 razvodnik
A = slobodan protok od 1 prema 2 i od 3 prema 4</p> <p>D konstrukcija
0 = uvrtni ventil</p> | <p>E napon
istosmjerna struja
012D = 12V DC
024D = 24V DC
promjenjivi napon
120A = 120V AC
240A = 240V AC
drugi naponi na pitanje</p> <p>F elektricni prikljucak
G = DIN 43650 konektor, drugi konektori vidi stranicu broj: CS-010-000-00</p> |
|--|--|

Tehnicke informacije

nazivni pritisak:	350 bar
nazivni protok:	60 l/min
tezina:	0,97 kg
podrucje temperature:	-40°C do 120°C
medium:	hidraulicno ulje po DIN 51524 T1 (ISO TC 131)
max. curenje:	85 ccm/min kod 22 cSt (50°C) i 350 bar
opcija:	opcionalno Buna (NBR) ili Viton (FPM), kao i teflon metalni prsten (PTFE)
apsorbovanje snage:	36 W
vrijeme reagovanja:	kod 100% promjene napona, nazivnog pritiska i ca. 80% protoka otvoren: ca. 50 ms zatvoren: ca. 50 ms
uvrtina:	C-12-4 vidi stranicu broj: IK-400-129-00 Obratiti paznju na uputu!
kuciste:	4LH-12.-B..vidi stranicu broj: IH-400-000-00
opcija:	podesavajuca rucica za upravljanje u nuzdi vidi stranicu broj: CS-020-000-00
komplet zaptivaca:	SP-CDS-12N-46 (NBR), SP-CDS-12V-46 (FPM)