


# nepovratni ventil-ploca CETOP 3 (sendvic ploca) u A+B RZ-06S-A+B



## Simbol


**Nazivni pritisak**  
350 bar

**Nazivni protok**  
30 l/min



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-110-206-00**  
(Promjene nisu isključene!)

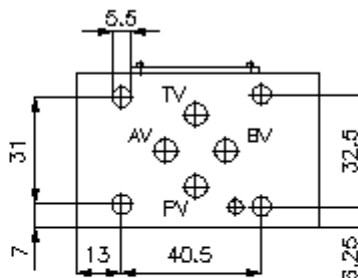

# nepovratni ventil-ploca CETOP 3 (sendvic ploca) u A+B RZ-06S-A+B



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-110-206-00**

(Promjene nisu isključene!)

## Primjer za porudzbu

RZ    - 06S - A+B  
|        |        |  
**A**      **B**      **C**

## Kljuc

- |  |   |
|--|---|
| <b>A</b> <b>izvedba</b><br>ploca za nepovratni ventil<br>sa semom po DIN 24340 forma A<br>izvedba senvic-ploca | <b>B</b> <b>velicina i materijal</b><br>06S = celik (9SMnPb28K odnosno GGG-40)    |
|  | <b>C</b> <b>konstrukcija/izvedba</b><br>A+B = nepovratni ventili u kanalima A i B |

## Tehnicke informacije

<b>nazivni pritisak:</b>	350 bar
<b>nazivni protok:</b>	30 l/min
<b>tezina:</b>	0,5 kg
<b>otvarajuci pritisak:</b>	0.2 - 0.3 bar (standard), visi pritisci na pitanje
<b>slobodan protok:</b>	vidi simbol
<b>ukljucujuci:</b>	DT-06 = nosac zaptivaca sa intergiranim O-prstenima (Viton FPM)