


nepovratni ventil-ploca CETOP 5 (sendvic ploca) u T RZ-10S-T



Simbol





Nazivni pritisak
350 bar

Nazivni protok
50 l/min




IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-110-401-00
(Promjene nisu isključene!)

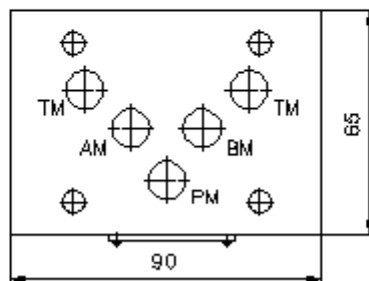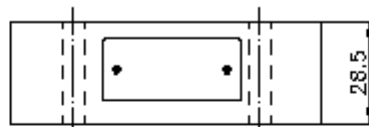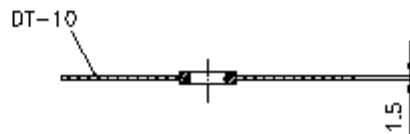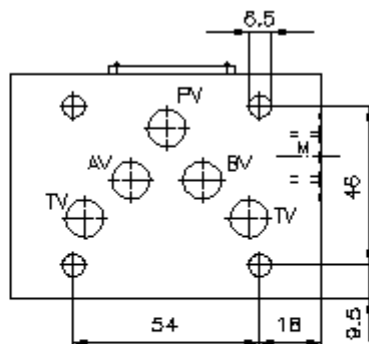

nepovratni ventil-ploca CETOP 5 (sendvic ploca) u T RZ-10S-T

Primjer za porudzbu



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-110-401-00
(Promjene nisu isključene!)

Kljuc

- A** **izvedba**
ploca za nepovratni ventil
sa semom po DIN 24340 forma A
izvedba senvic-ploca
- B** **velicina i materijal**
10S = celik (9SMnPb28K odnosno GGG-40)
- C** **konstrukcija/izvedba**
T = nepovratni ventil u "T" kanalu

Tehnicke informacije

nazivni pritisak:	350 bar
nazivni protok:	50 l/min
tezina:	1,1 kg
otvarajuci pritisak:	0,2 - 0,3 bar
slobodan protok:	vidi simbol
ukljucujuci:	DT-10 = nosac zaptivaca sa intergiranim O-prstenima (Viton FPM)