


**nepovratni ventil-ploca CETOP 8
(sendvic ploca) od B prema P
RVZ-25A-BP**



Simbol




Nazivni pritisak
250 bar

Nazivni protok
240 l/min

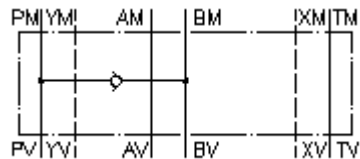

IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-110-604-00
(Promjene nisu isključene!)

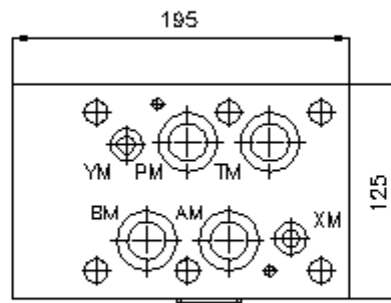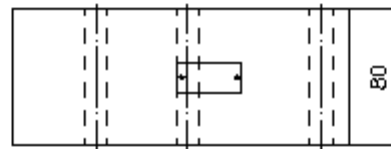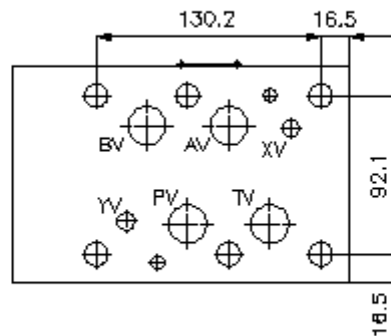

nepovratni ventil-ploca CETOP 8 (sendvic ploca) od B prema P RVZ-25A-BP



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-110-604-00

(Promjene nisu isključene!)

Primjer za porudzbu

RVZ - 25A - BP
| | |
A **B** **C**

Kljuc

- | | |
|--|---|
| A izvedba
ploca za nepovratni ventil
sa semom po DIN 24340 forma A
izvedba senvic-ploca | B velicina i materijal
25A = aluminum (F37) |
| | C konstrukcija/izvedba
BP = nepovratni ventil od "B" kanala do "P" |

Tehnicke informacije

nazivni pritisak:	250 bar
nazivni protok:	240 l/min
tezina:	3,2 kg
otvarajuci pritisak:	0.2 - 0.3 bar (standard), visi pritisci na pitanje
slobodan protok:	vidi simbol
ukljucujuci:	3 kom. O-prstena 28.17 x 3.53 3 kom. O-prstena 14.00 x 2.65 3 kom. O-prstena 34.00 x 2.50 3 kom. O-prstena 16.00 x 1.50