

**nepovratni ventil-ploca CETOP 5
(sendvic ploca) u P sa priklj. u D
RCZ-10S-PD**




IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>



Simbol


Nazivni pritisak
350 bar

Nazivni protok
60 l/min



IZ-120-450-00

(Promjene nisu isključene!)

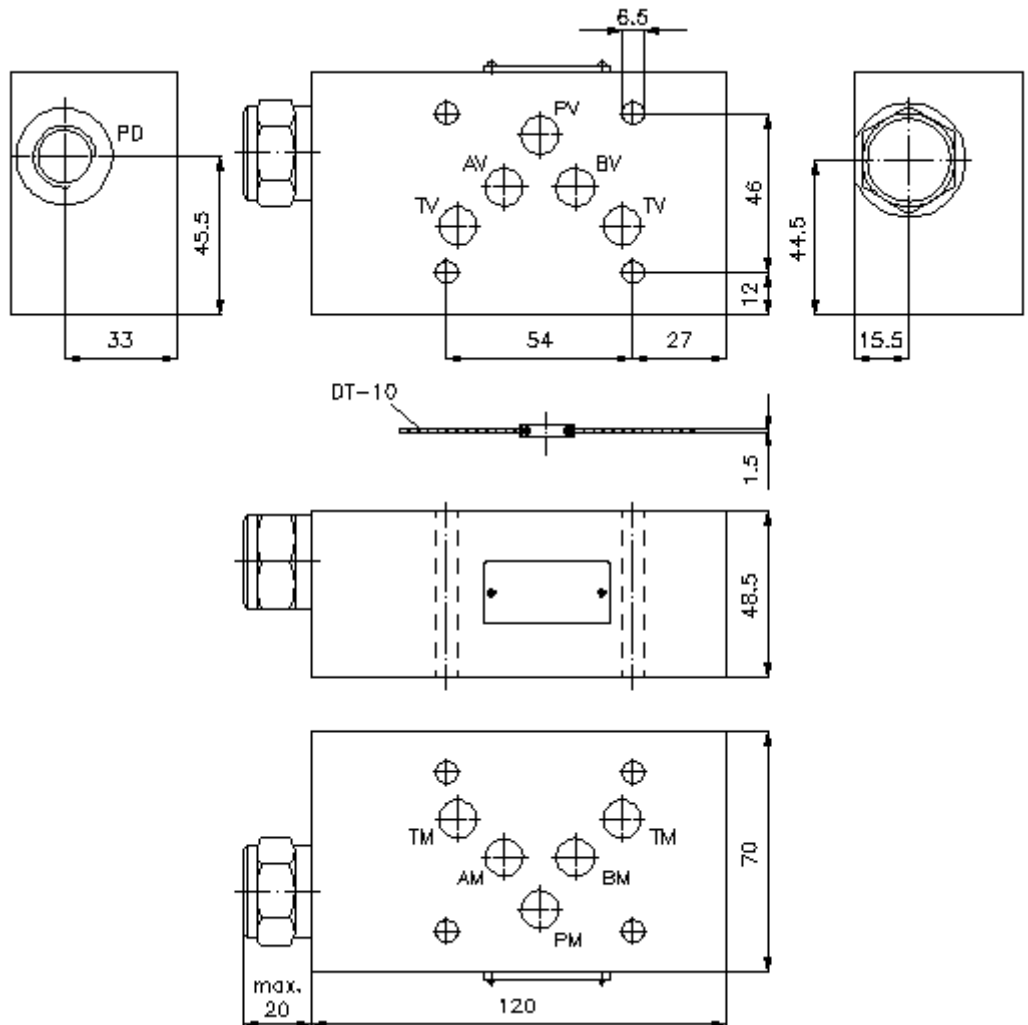

nepovratni ventil-ploca CETOP 5 (sendvic ploca) u P sa priklj. u D RCZ-10S-PD



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-120-450-00

(Promjene nisu isključene!)

Primjer za porudzbu

RCZ - 10S - PD
| | |
A **B** **C**

Kljuc

- | | |
|--|---|
| A izvedba
ploca za nepovratni ventil
sa semom po DIN 24340 forma A
izvedba senvic-ploca | B velicina i materijal
10S = celik (9SMnPb28K odnosno GGG-40) |
| | C konstrukcija/izvedba
PD = nepovratni ventil u "P" kanalu sa
prikljuckom za akumulator |

Tehnicke informacije

nazivni pritisak:	350 bar
nazivni protok:	60 l/min
tezina:	3, 3 kg
otvarajuci pritisak:	ca. 1,0 bar (standard), ostali pritisci na pitanje
slobodan protok:	vidi simbol
nepovratni ventil:	CVFP-10.-0-.. Vidi stranicu broj: CC-110-101-00
ukljucujuci:	DT-10 = nosac zaptivaca sa intergiranim O-prstenima (Viton FPM)