


**ploca diferencijalnog spoja CETOP 3  
(sendvic ploca) u A sa mlaznicom  
DSZ-06S-A/...mm**



**Simbol**




**Nazivni pritisak**  
350 bar

**Nazivni protok**  
30 l/min



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>


**IZ-210-201-00**  
(Promjene nisu isključene!)

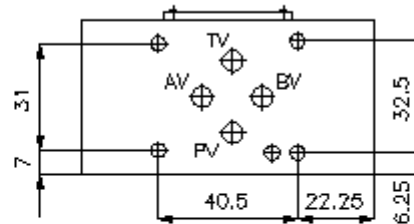

**ploca diferencijalnog spoja CETOP 3  
(sendvic ploca) u A sa mlaznicom  
DSZ-06S-A/...mm**

**Primjer za porudzbu**

DSZ - 06S - A/1.0 MM



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-210-201-00**

(Promjene nisu isključene!)

**Kljuc**

**A** **izvedba**  
ploca diferencijalnog spoja  
sa semom po DIN 24340 forma A  
izvedba senvic-ploca

**B** **velicina i materijal**  
06S = celik (9SMnPb28K odnosno GGG-40)

**C** **konstrukcija/izvedba**  
A/1.0mm = nepovratni ventil sa  
prigusnicom od 1.0 mm u A kanalu

**Tehnicke informacije**

**nazivni pritisak:** 350 bar

**nazivni protok:** 30 l/min

**tezina:** 1,1 kg

**otvarajuci pritisak:** 0,2 - 0,3 bar

**slobodan protok:** vidi simbol

**ukljucujuci:** DT-06 = nosac zaptivaca sa intergiranim O-prstenima (Viton FPM)