


**ploca diferencijalnog spoja CETOP 7  
(sendvic ploca) u B sa mlaznicom  
DSVZ-16S-BS/1.0mm**



**Simbol**


**Nazivni pritisak**  
350 bar

**Nazivni protok**  
140 l/min



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>


**IZ-210-503-00**  
(Promjene nisu isključene!)

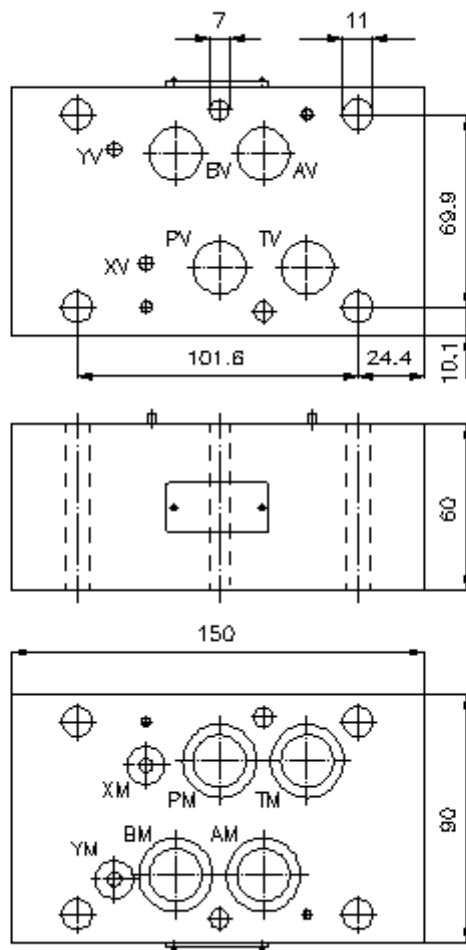

**ploca diferencijalnog spoja CETOP 7  
(sendvic ploca) u B sa mlaznicom  
DSVZ-16S-BS/1.0mm**

**Primjer za porudzbu**

DSVZ - 16S - BS/1.0 MM



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-210-503-00**

(Promjene nisu isključene!)

**Kljuc**

- |   |   |
|---|---|
| <p><b>A</b> <b>izvedba</b><br/>ploca diferencijalnog spoja<br/>sa semom po DIN 24340 forma A<br/>izvedba senvic-ploca</p> | <p><b>B</b> <b>velicina i materijal</b><br/>16S = celik (9SMnPb28K odnosno GGG-40)</p> <p><b>C</b> <b>konstrukcija/izvedba</b><br/>BS/1.0mm = nepovratni ventil sa blendom<br/>od 1.0 mm u "B" kanalu</p> |
|---|---|

**Tehnicke informacije**

<b>nazivni pritisak:</b>	350 bar
<b>nazivni protok:</b>	140 l/min
<b>tezina:</b>	5,7 kg
<b>otvarajuci pritisak:</b>	0,2 - 0,3 bar
<b>slobodan protok:</b>	vidi simbol
<b>ukljucujuci:</b>	3 kom. O-prstena 22.22 x 2.62 3 kom. O-prstena 9.19 x 2.62 2 kom. O-prstena 25.00 x 2.50