


**sigurnosni ventil, CETOP 7
(sendvic ploca) u P prema T
DBVZ-16.-PPS./..**



Simbol


Nazivni pritisak
350 bar

Nazivni protok
230 l/min

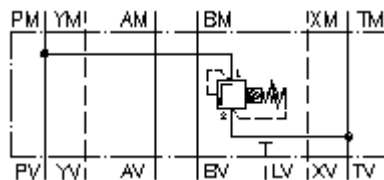

IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-410-550-00
(Promjene nisu isključene!)

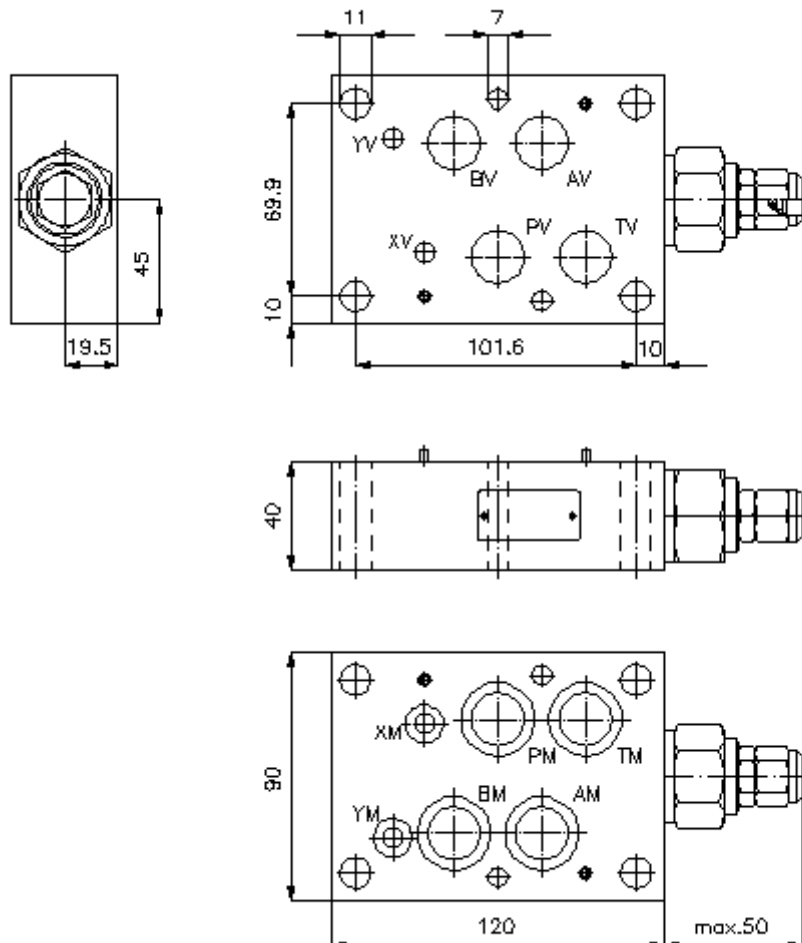

sigurnosni ventil, CETOP 7 (sendvic ploca) u P prema T DBVZ-16.-PPS./..



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-410-550-00

(Promjene nisu isključene!)

Primjer za porudzbu

DBVZ - 16A - P PS C / 15
| | | | |
A **B** **C** **D** **E** **F**

Kljuc

- | | |
|--|--|
| A izvedba
ventil za ogranicenje pritiska
sa semom po DIN 24340 forma A
izvedba senvic-ploca | D ventil za ogranicenje pritiska
PS = RVPS-12.-... (predupravljan) vidi
stanicu broj: <u>CP-110-121-00</u> |
| B velicina i materijal
16A = aluminum (F37)
16S = celik (9SMnPb28K odnosno GGG-40) | E vrsta podesavanja
C = cep |
| C konstrukcija/izvedba
P = djelovanje u P | F stepeni pritiska (RVPS)
15 = 3,4 - 105 bar
30 = 3,4 - 210 bar
50 = 3,4 - 350 bar |

Tehnicke informacije

- | | |
|--|---|
| nazivni pritisak: | 250 bar (A)
350 bar (S) |
| nazivni protok: | 230 l/min |
| tezina: | 1,5 / 3,6 kg (A/S) |
| ventil za ogranicenje pritiska: | RVPS-12.-... vidi stranicu broj: <u>CP-110-121-00</u> |
| uljucujuci: | 4 kom. O-prstena 22.42 x 2.62
2 kom. O-prstena 9.19 x 2.62 |