


**sigurnosni ventil, CETOP 7
(sendvic ploca) u A+B prema T
DBVZ-16.-A+BPS./..**



Simbol


Nazivni pritisak
350 bar

Nazivni protok
230 l/min

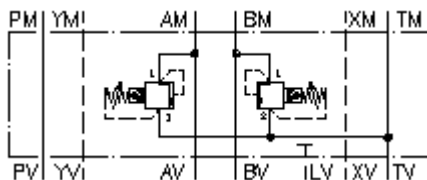

IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-420-550-00
(Promjene nisu isključene!)

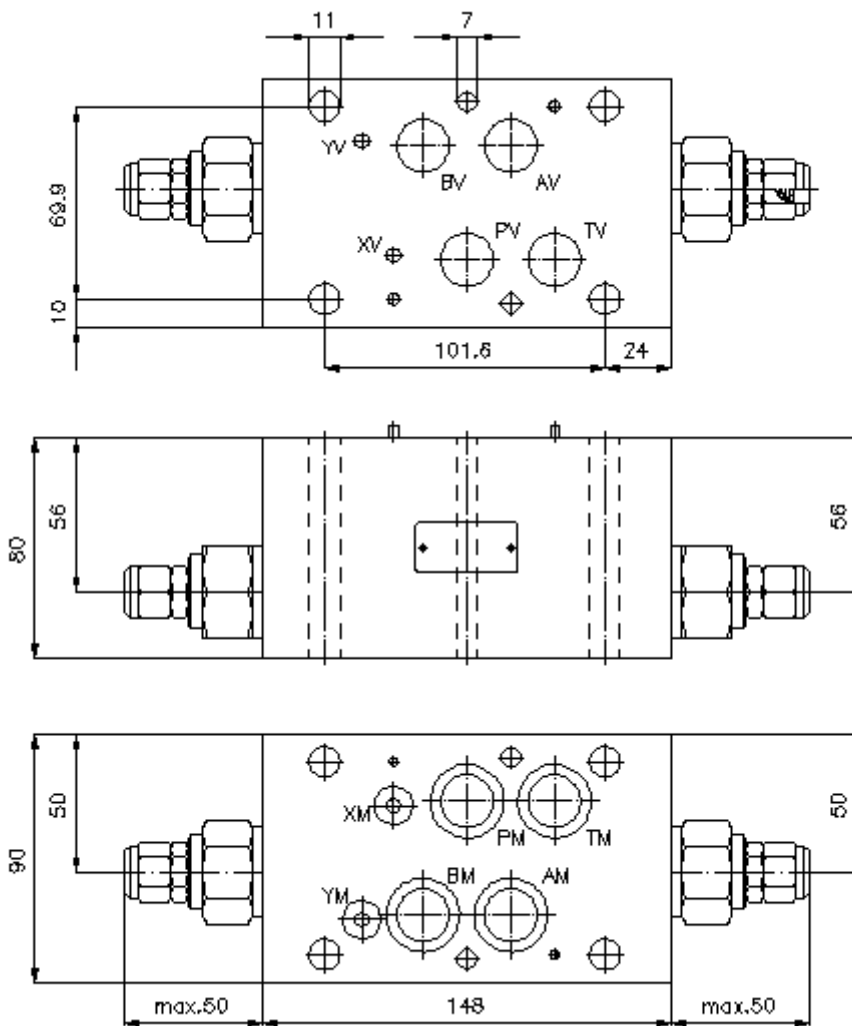

**sigurnosni ventil, CETOP 7
(sendvic ploca) u A+B prema T
DBVZ-16.-A+BPS./..**



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-420-550-00

(Promjene nisu isključene!)

Primjer za porudzbu

DBVZ - 16A - A+B PS C / 15
| | | | | |
A B C D E F

Kljuc

- | | |
|--|--|
| <p>A izvedba
ventil za ogranicenje pritiska
sa semom po DIN 24340 forma A
izvedba senvic-ploca</p> <p>B velicina i materijal
16A = aluminum (F37)
16S = celik (9SMnPb28K odnosno GGG-40)</p> <p>C konstrukcija/izvedba
A+B = djelujuci u A i B</p> | <p>D ventil za ogranicenje pritiska
PS = RVPS-12.-... (predupravljan) vidi
stanicu broj: <u>CP-110-121-00</u></p> <p>E vrsta podesavanja
C = cep</p> <p>F stepeni pritiska (RVPS)
15 = 3,4 - 105 bar
30 = 3,4 - 210 bar
50 = 3,4 - 350 bar</p> |
|--|--|

Tehnicke informacije

nazivni pritisak: 250 bar (A)
350 bar (S)

nazivni protok: 230 l/min

tezina: 2,5 / 7,5 kg (A/S)

ventil za ogranicenje pritiska: RVPS-12.-... vidi stranicu broj: CP-110-121-00

uljucujuci: 4 kom. O-prstena 22.42 x 2.62
2 kom. O-prstena 9.19 x 2.62