


**sigurn. ventil u oba smjera CETOP 5
(sendvic ploca) A prema B+B prema A
DDBVZ-10.-01./..**



Simbol


Nazivni pritisak
350 bar

Nazivni protok
75 l/min



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-425-400-00
(Promjene nisu isključene!)

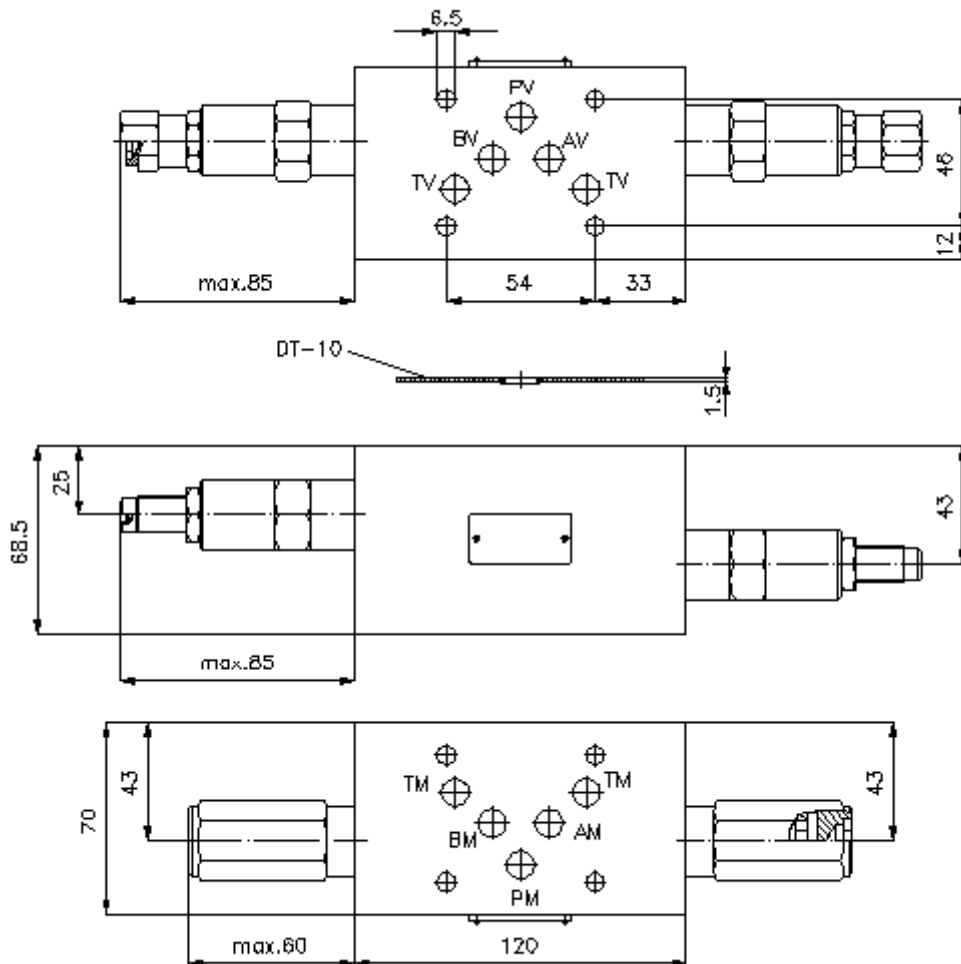

sigurn. ventil u oba smjera CETOP 5 (sendvic ploca) A prema B+B prema A DDBVZ-10.-01./..



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-425-400-00

(Promjene nisu isključene!)

Primjer za porudzbu

DDBVZ - 10A - 01 C / 18
| | | | |
A **B** **C** **D** **E**

Kljuc

- | | |
|--|---|
| <p>A izvedba
dupli ventil za ogranicenje pritiska
sa semom po DIN 24340 forma A
izvedba senvic-ploca</p> <p>B velicina i materijal
10A = aluminom (F37)
10S = celik (9SMnPb28K odnosno GGG-40)</p> <p>C ventil za ogranicenje pritiska
01 = RV1-10.-.. (direktno upravljjan) vidi
stranicu broj: MP-100-100-00
03 = RV3-10.-.. (direktno upravljjan) vidi
stranicu broj: MP-130-101-00
06 = RV6-10.-.. (direktno upravljjan) vidi
stranicu broj: MP-110-101-00
08 = RV8-10.-.. (direktno upravljjan) vidi
stranicu broj: MP-140-101-00
10 = RV10-10.-.. (direktno upravljjan) vidi
stranicu broj: MP-110-103-00</p> <p>D vrsta podesavanja
J = sestouglasti otvor (ne za RV6 + RV10)
S = vreteno sa zavojnicom
C = cep</p> | <p>E stepen pritiska
RV1-10.-..
03 = 3,4 - 21 bar
09 = 6,9 - 62 bar
18 = 17,2 - 124 bar
36 = 34,5 - 248 bar
RV3-10.-..
03 = 3,4 - 21 bar
06 = 6,9 - 41 bar
09 = 13,8 - 62 bar
18 = 20,7 - 124 bar
36 = 20,7 - 248 bar
RV6-10.-..
25 = 3,4 - 172 bar
50 = 137,9 - 350 bar
RV8-10.-..
04 = 3,4 - 31 bar
12 = 6,9 - 86 bar
25 = 17,2 - 172 bar
50 = 37,9 - 350 bar
RV10.-..
02 = 1,7 - 17 bar
05 = 3,4 - 31 bar
10 = 17,2 - 69 bar</p> |
|--|---|

Tehnicke informacije

nazivni pritisak:	250 bar (A) 350 bar (S)
nazivni protok:	75 l/min
tezina:	1,5 / 4,1 kg (A/S)
ukljucujuci:	DT-10 = nosac zaptivaca sa intergiranim O-prstenima (Viton FPM)