

**sigurn. ventil u oba smjera CETOP 5
(sendvic ploca) A prema B+B prema A
DDBVZ-10.-DA./..**




IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>



Simbol


Nazivni pritisak
350 bar

Nazivni protok
75 l/min



IZ-425-450-00

(Promjene nisu isključene!)

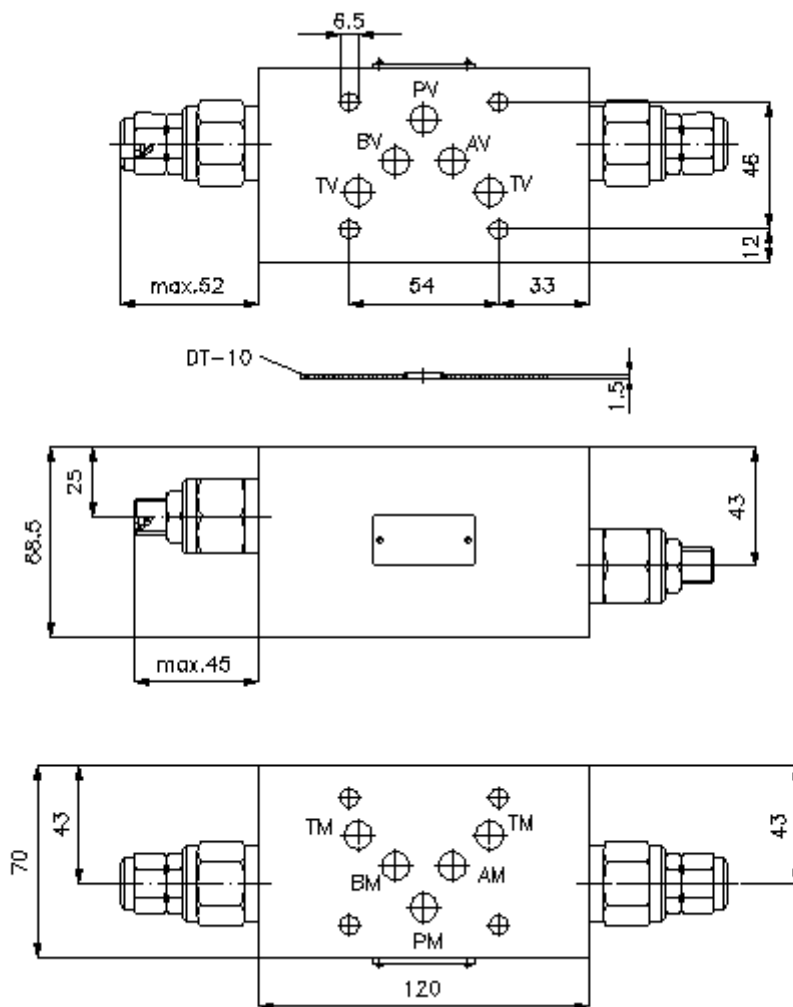

sigurn. ventil u oba smjera CETOP 5 (sendvic ploca) A prema B+B prema A DDBVZ-10.-DA./..



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-425-450-00

(Promjene nisu isključene!)

Primjer za porudzbu

DDBVZ - 10A - DA C / 30
| | | | |
A **B** **C** **D** **E**

Kljuc

- | | |
|--|--|
| <p>A izvedba
dupli ventil za ogranicenje pritiska
sa semom po DIN 24340 forma A
izvedba senvic-ploca</p> <p>B velicina i materijal
10A = aluminum (F37)
10S = celik (9SMnPb28K odnosno GGG-40)</p> <p>C ventil za ogranicenje pritiska
DA = RVDA-10.-... vidi stranicu broj: CP-120-101-00</p> | <p>D vrsta podesavanja
S = vreteno sa zavojnicom
C = cep</p> <p>E stepen pritiska
RVDA-10.-..
15 = 6,9 - 105 bar
30 = 20,7 - 210 bar
50 = 34,5 - 350 bar</p> |
|--|--|

Tehnicke informacije

nazivni pritisak:	250 bar (A) 350 bar (S)
nazivni protok:	75 l/min
tezina:	1,5 / 4,1 kg (A/S)
ukljucujuci:	DT-10 = nosac zaptivaca sa intergiranim O-prstenima (Viton FPM)