


**trogr.uvrtni regul.pritiska CETOP 5
(sendvic ploca) u P, predupravljan
DMVZ-10.-P12./12-..**



Simbol





Nazivni pritisak
350 bar

Nazivni protok
115 l/min



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-435-400-00
(Promjene nisu isključene!)

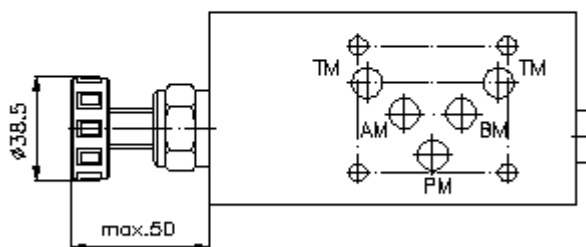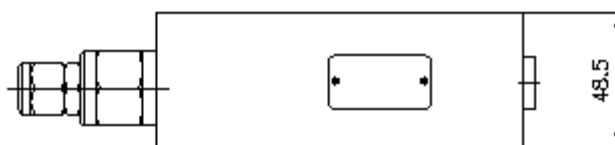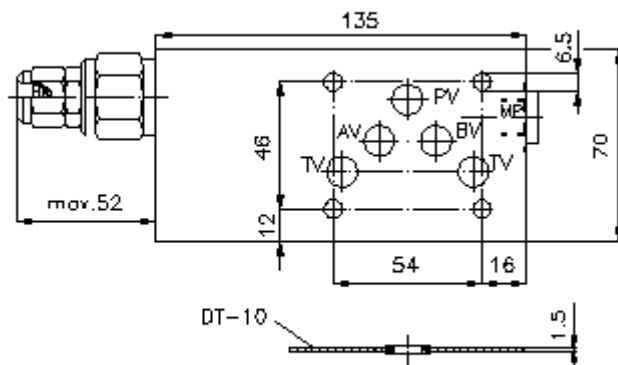

**trogr.uvrtni regul.pritiska CETOP 5
(sendvic ploca) u P, predupravljan
DMVZ-10.-P12./12-..**



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-435-400-00

(Promjene nisu isklucene!)

Primjer za porudzbu

DMVZ - 10A - P 12 C / 12 - 30
| | | | | | |
A B C D E F G

Kljuc

- A izvedba**
regulator pritiska
vrsta podesavanja
predupravljan
pokretni ventil
sa semom po DIN 24340 forma A
izvedba senvic-ploca
- B velicina i materijal**
10A = aluminij (F37)
10S = celik (9SMnPb28K odnosno GGG-40)
- C konstrukcija/izvedba**
P = djelovanje u P
- D regulator pritiska**
12 = PRRS-12-...(predupravljan) vidi
stranicu broj: [MP-240-121-00](#)
- E vrsta podesavanja**
C = cep
K = rucni tocak
- F velicina uvrtnog ventila**
PRV12-12.
- G stepeni pritiska (PRV12)**
15 = 10,3 - 105 bar
30 = 17,2 - 210 bar
50 = 24,1 - 350 bar

Tehnicke informacije

- nazivni pritisak:** 250 bar (A)
350 bar (S)
- nazivni protok:** 115 l/min
- tezina:** 1,5 / 4,2 kg (A/S)
- trograni regulator
pritiska:** PRV12-10.-... vidi stranicu broj: [MP-240-121-00](#)
- ukljucujuci:** DT-10 = nosac zaptivaca sa intergiranim O-prstenima (Viton FPM)