


**ventil CETOP 3 za ogran. pritiska
(sendvic ploca) u T, dir. upravljjan
VSZ-06.-T01./..**



Simbol




Nazivni pritisak
350 bar

Nazivni protok
60 l/min



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-510-203-00
(Promjene nisu isključene!)

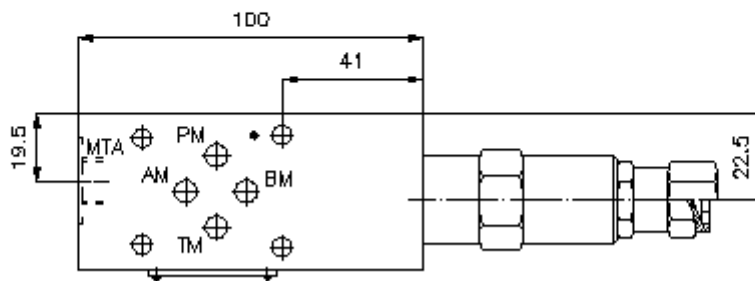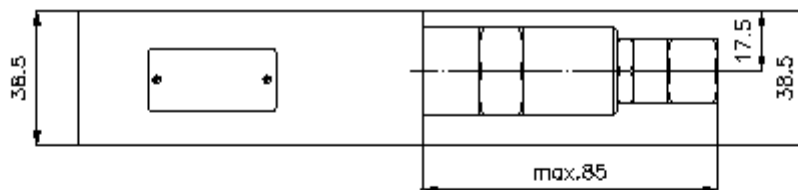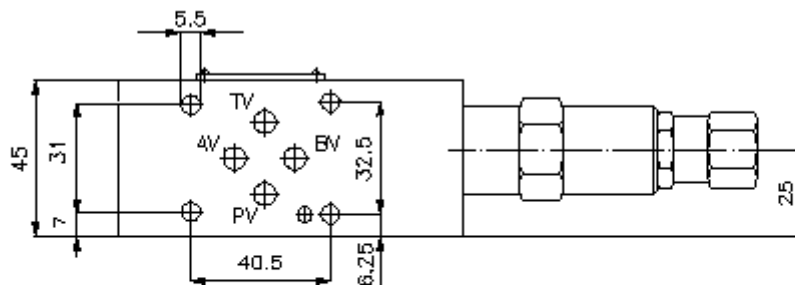

**ventil CETOP 3 za ogran. pritiska
(sendvic ploca) u T, dir. upravljjan
VSZ-06.-T01./..**



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-510-203-00

(Promjene nisu isključene!)

Primjer za porudzbu

VSZ - 06A - T 01 C / 35
| | | | | |
A B C D E F

Kljuc

- | | |
|---|---|
| <p>A izvedba
ventil sa ogranicenje pritiska
vrsta podesavanja
predupravljjan
ventil sa konusnim lezistem
sa semom po DIN 24340 forma A
izvedba senvic-ploca</p> <p>B velicina i materijal
06A = aluminun (F37)
06S = celik (9SMnPb28K odnosno GGG-40)</p> | <p>C konstrukcija/izvedba
T = djelovanje u T</p> <p>D ventil za ogranicenje pritiska
01 = RV1-10.-.. (direktno upravljjan) vidi
stranicu broj: <u>MP-100-100-00</u></p> <p>E vrsta podesavanja
C = cep</p> <p>F podrucje podesavanja pritiska
03 = 3,4 - 21 bar
09 = 6,9 - 62 bar
18 = 17,2 - 124 bar
36 = 34,5 - 248 bar</p> |
|---|---|

Tehnicke informacije

- nazivni pritisak:** 250 bar (A)
350 bar (S)
- nazivni protok:** 60 l/min
- tezina:** 0,7 / 1,3 kg (A/S)
- ventil za ogranicenje
pritiska:** RV1-10.-.. vidi stranicu broj: MP-100-100-00
- ukljucujuci:** DT-06 = nosac zaptivaca sa intergiranim O-prstenima (Viton FPM)