


**ventil za balans. tereta, CETOP 3
(sendvic ploca) u A (opruga rast.)
SBLZ-06.-APGC/..**



Simbol




Nazivni pritisak
350 bar

Nazivni protok
60 l/min



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-520-253-00
(Promjene nisu isključene!)

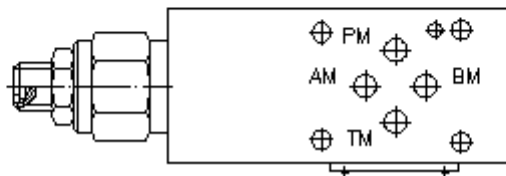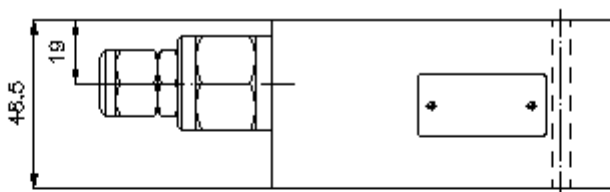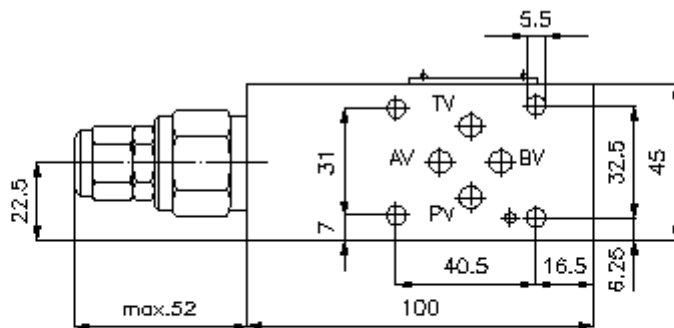

**ventil za balans. tereta, CETOP 3
(sendvic ploca) u A (opruga rast.)
SBLZ-06.-APGC/..**



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-520-253-00

(Promjene nisu isključene!)

Primjer za porudzbu

SBLZ - 06A - A PG C / 50
| | | | | |
A B C D E F

Kljuc

- | | |
|---|---|
| <p>A izvedba
ventil za balansiranje tereta
sa semom po DIN 24340 forma A
izvedba senvic-ploca</p> <p>B velicina i materijal
06A = aluminij (F37)
06S = celik (9SMnPb28K odnosno GGG-40)</p> <p>C konstrukcija/izvedba
A = djelovanje u A</p> | <p>D kocni ventil (odnos otvaranja 4:1)
PG = CBPG-10.-.. (opruga rasterećena)</p> <p>E vrsta podesavanja
C = cep
S = vreteno sa zavojnicom</p> <p>F stepen pritiska (CBPG)
15 = 3,4 - 105 bar
30 = 6,9 - 210 bar
50 = 10,3 - 350 bar</p> |
|---|---|

Tehnicke informacije

- nazivni pritisak:** 350 bar (S)
250 bar (A)
- nazivni protok:** 60 l/min
- tezina:** 0,9 / 2, 2 kg (A/S)
- ventili za balansiranje opterećenja:** CBPG-10.-..vidi stranicu broj: [CC-420-101-00](#)
- uključujući:** DT-06 = nosac zaptivaca sa intergiranim O-prstenima (Viton FPM)