


**ventil za balans. tereta, CETOP 3  
(sendvic ploca) u A+B (opruga rast.)  
SBLZ-06.-A+BPGC/..**



**Simbol**


**Nazivni pritisak**  
350 bar

**Nazivni protok**  
60 l/min



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-520-255-00**  
(Promjene nisu isključene!)

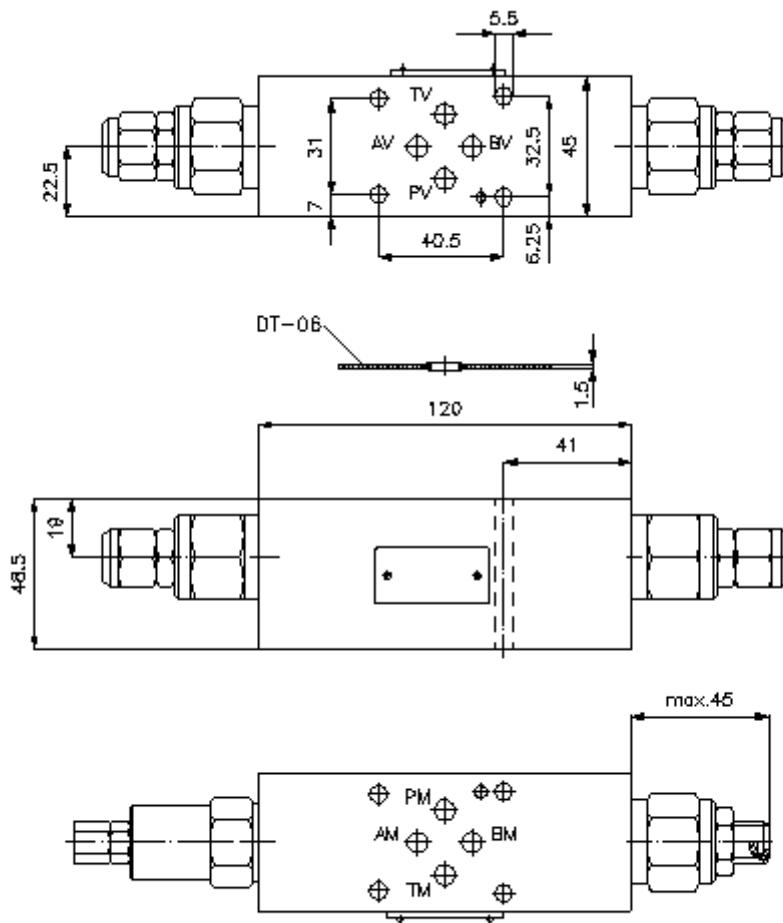

**ventil za balans. tereta, CETOP 3  
(sendvic ploca) u A+B(opruga rast.)  
SBLZ-06.-A+BPGC/..**



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-520-255-00**

(Promjene nisu isključene!)

**Primjer za porudzbu**

SBLZ - 06A - A+B PG C / 50  
| | | | |  
**A B C D E F**

**Kljuc**

- |   |   |
|---|---|
| <b>A</b> <b>izvedba</b><br>ventil za balansiranje tereta<br>sa semom po DIN 24340 forma A<br>izvedba senvic-ploca | <b>D</b> <b>kocni ventil (odnos otvaranja 4:1)</b><br>PG = CBPG-10.-.. (opruga rasterecena)               |
| <b>B</b> <b>velicina i materijal</b><br>06A = aluminij (F37)<br>06S = celik (9SMnPb28K odnosno GGG-40)            | <b>E</b> <b>vrsta podesavanja</b><br>C = cep<br>S = vreteno sa zavojnicom                                 |
| <b>C</b> <b>konstrukcija/izvedba</b><br>A+B = djelujuci u A i B   | <b>F</b> <b>stepen pritiska (CBPG)</b><br>15 = 3,4 - 105 bar<br>30 = 6,9 - 210 bar<br>50 = 10,3 - 350 bar |

**Tehnicke informacije**

- nazivni pritisak:** 350 bar (S)  
250 bar (A)
- nazivni protok:** 60 l/min
- tezina:** 1,1 / 2,4 kg (A/S)
- ventili za balansiranje opterecenja:** CBPG-10.-..vidi stranicu broj: [CC-420-101-00](#)
- ukljucujuci:** DT-06 = nosac zaptivaca sa intergiranim O-prstenima (Viton FPM)