


**ventil za balans. tereta, CETOP 7
(sendvic ploca) u A+B
SBLZ-16.-A+BP.C/..**



Simbol


Nazivni pritisak
275 bar

Nazivni protok
135 l/min

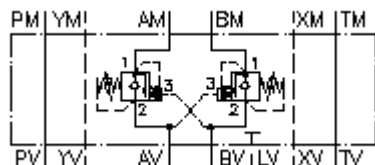

IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-530-552-00
(Promjene nisu isključene!)

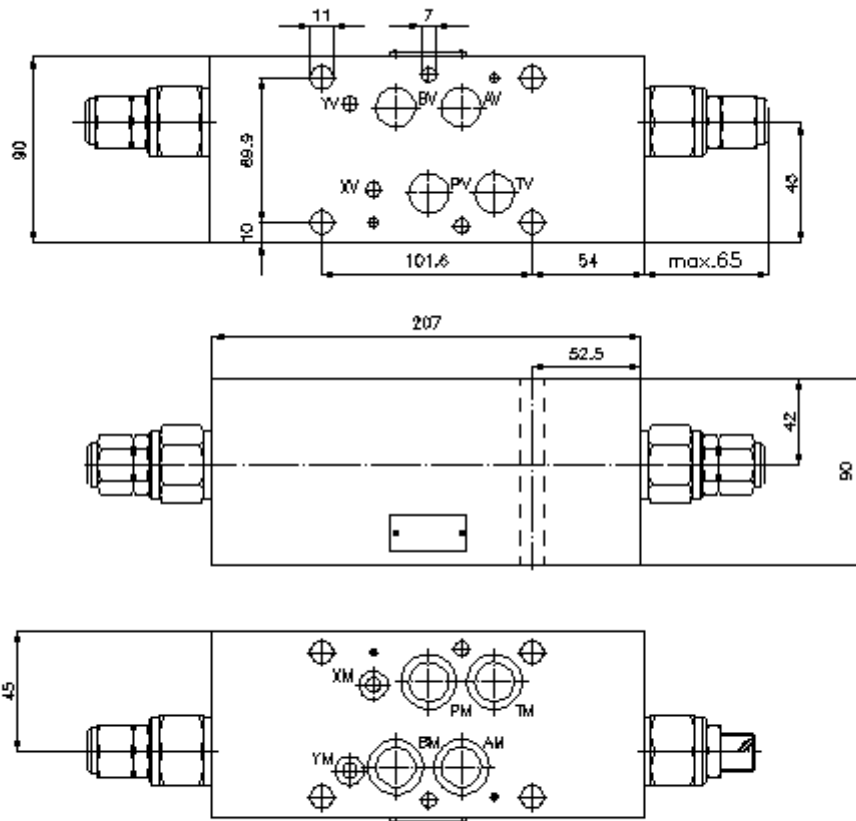

**ventil za balans. tereta, CETOP 7
(sendvic ploca) u A+B
SBLZ-16.-A+BP.C/..**



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-530-552-00

(Promjene nisu isključene!)

Primjer za porudzbu

SBLZ - 16A - A+B PA C / 30
| | | | | |
A B C D E F

Kljuc

- | | |
|---|---|
| <p>A izvedba
ventil za balansiranje tereta
sa semom po DIN 24340 forma A
izvedba senvic-ploca</p> <p>B velicina i materijal
16A = aluminij (F37)
16S = celik (9SMnPb28K odnosno GGG-40)</p> <p>C konstrukcija/izvedba
A+B = djelujuci u A i B</p> <p>D kocni ventil (odnos otvaranja 4:1)
PA = CBPA-12.-.. (bez zaptivaca na klipcu)
PS = CBPS-12.-.. (sa zaptivacem na klipcu)</p> | <p>E vrsta podesavanja
C = cep
S = vreteno sa zavojnicom</p> <p>F stepen pritiska (CBPA, CBPS)
15 = 3,4 - 105 bar
30 = 20,7 - 210 bar
40 = 41,4 - 276 bar</p> |
|---|---|

Tehnicke informacije

- nazivni pritisak:** 250 bar (A)
275 bar (S)
- nazivni protok:** 135 l/min
- tezina:** 4,8 kg
- ventili za balansiranje opterecenja:** CBP.-12.-.. vidi stranicu broj: [CC-410-121-00](#)
- ukljucujuci:** 4 kom. O-prstena 22.42 x 2.62
2 kom. O-prstena 9.19 x 2.62