


**trogr.prit.vaga,send.ploca CETOP 3
(sendvic ploca) u P prema T
SR3Z-06S-P02./.....**




Simbol

Nazivni pritisak
350 bar



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-660-200-00
(Promjene nisu isključene!)

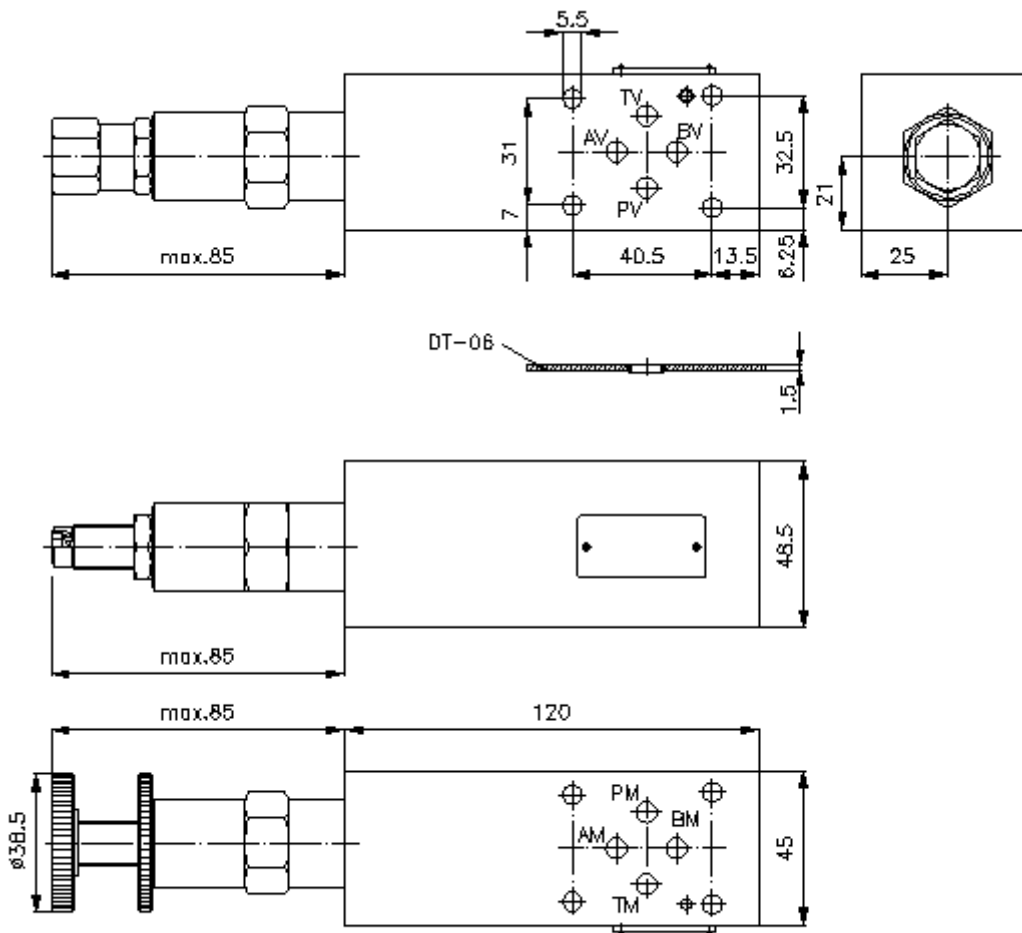

**trogr.prit.vaga,send.ploca CETOP 3
(sendvic ploca) u P prema T
SR3Z-06S-P02./.....**




IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-660-200-00

(Promjene nisu isključene!)

Primjer za porudzbu

SR3Z - 06S - P 02 C / 06.00



Kljuc

- | | |
|---|---|
| <p>A izvedba
regulator protoka
max. 50% reduciranje volumena protoka
podesenog od fabriceke strane
sa semom po DIN 24340 forma A
izvedba senvic-ploca</p> <p>B velicina i materijal
06S = celik (9SMnPb28K odnosno GGG-40)</p> <p>C konstrukcija/izvedba
P = djelovanje u P (doticanje)</p> <p>D regulator protoka
02 = PFR2-10.-..</p> | <p>E vrsta podesavanja
S = vreteno sa zavojnicom
C = cep
K = rucni tocak</p> <p>F zeljeni regulirani protok ulja
(PFR2) naznaceno u gpm
1 l/min = 0,265 Gpm
(1 Gpm = 3,785 l/min)</p> |
|---|---|

Tehnicke informacije

- nazivni pritisak:** 350 bar
- tezina:** 1,6 kg
- regulator protoka:** PFR2-10.-.-0-.. vidi stranicu broj: MF-250-100-00
- ukljucujuci:** DT-06 = nosac zaptivaca sa intergiranim O-prstenima (Viton FPM)