


**kuciste, sendvic ploca, CETOP 8  
od A prema B i B prema A  
MGZ-25.-AB/16+BA/16-10**




**Simbol**

**Nazivni pritisak**  
350 bar

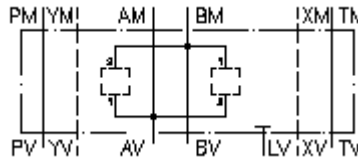

IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-960-300-00**  
(Promjene nisu isključene!)

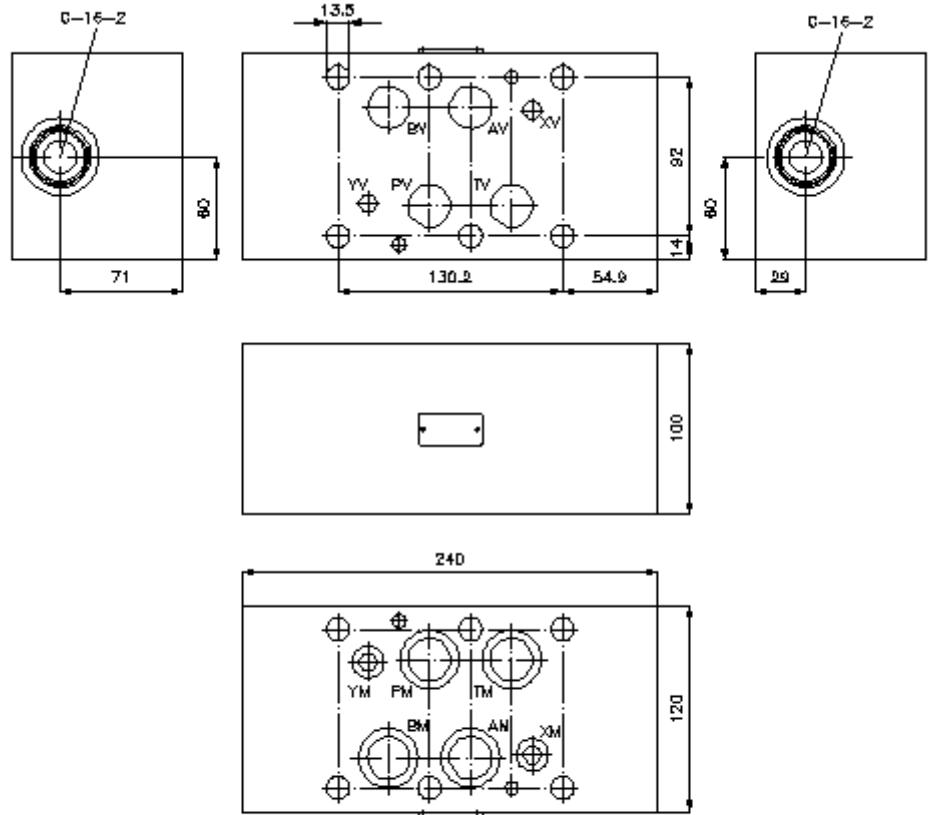

**kuciste, sendvic ploca, CETOP 8  
od A prema B i B prema A  
MGZ-25.-AB/16+BA/16-10**



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-960-300-00**

(Promjene nisu isključene!)

**Primjer za porudzbu**

MGZ - 25A - AB / 16 + BA / 16 - 10

A B C D E F G

**Kljuc**

- |                                                                                                           |                                                                      |
|-----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| <b>A</b> <b>izvedba</b><br>visenamjensko kuciste<br>sa semom po DIN 24340 forma A<br>izvedba senvic-ploca | <b>C</b> <b>izvedba</b><br>AB = za jedan uvrtni ventil izmedju A i B |
| <b>B</b> <b>velicina i materijal</b><br>25A = aluminum (F37)<br>25S = celik (9SMnPb28K odnosno GGG-40)    | <b>D</b> <b>velicina uvtine</b><br>velicina 16                       |
|                                                                                                           | <b>E</b> <b>izvedba</b><br>BA = za jedan uvrtni ventil izmedju B i A |
|                                                                                                           | <b>F</b> <b>velicina uvtine</b><br>velicina 16                       |
|                                                                                                           | <b>G</b> <b>visina</b><br>10 = 100 mm                                |

**Tehnicke informacije**

- nazivni pritisak:** 350 bar (S)  
250 bar (A)
- tezina:** 7,6 / 16,6 kg (A/S)
- uvrtina:** C-16-2 vidi stranicu broj: IK-100-169-00
- uljucujuci:** 4 kom. O-prstena 28.17 x 3.53  
2 kom. O-prstena 14.00 x 2.65