

**predupr. redosljedni uvrtni ventil
-ventil
PUV3-10.-.-0-...-**



Simbol

Nazivni pritisak
210 bar

Nazivni protok
4 l/min



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>





MP-810-100-00
(Promjene nisu isključene!)

promjer kljuca
3/4"

promjer kljuca 1"
(stezni
obrtni moment:
48 - 54 Nm)

izvrtina:
C-10-3
vidi
stranicu broj:
IK-300-109-00

velicina kljuca
3/16"

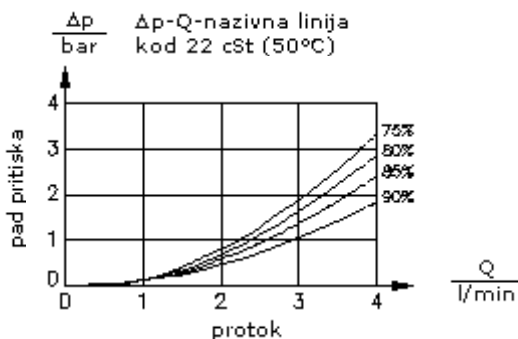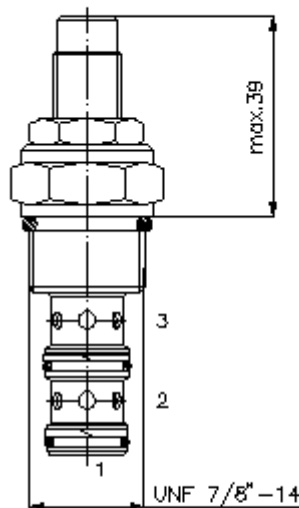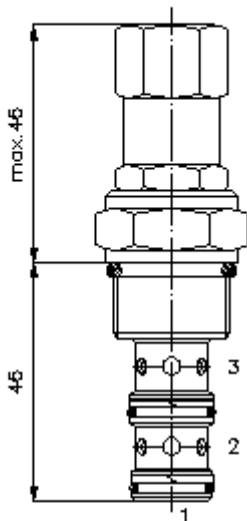

**predupr. redosljedni uvrtni ventil
-ventil
PUV3-10.-0-0-...-**

Primjer za porudzbu

PUV3 - 10N - C - 0 - 85 - 30

↓	↓	↓	↓	↓	↓
A	B	C	D	E	F



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

MP-810-100-00
(Promjene nisu isključene!)

Kljuc

- A** **izvedba**
predupravljani redosljedni ventil
- B** **velicina i zaptivac**
10N = buna (NBR)
10V = viton (FPM)
- C** **vrsta podesavanja**
S = vreteno sa zavojnicom
C = cep
- D** **konstrukcija**
0 = uvrtni ventil

- E** **razlika prenosnog pritiska**
75 = 75%
80 = 80%
85 = 85%
90 = 90%
- F** **stepen pritiska**
15 = 20,7 - 105 bar
30 = 103,4 - 210 bar

Tehnicke informacije

- nazivni pritisak:** 210 bar
- nazivni protok:** 4 l/min
- tezina:** 0,15 kg
- podrucje temperature:** -40°C do 120°C
- medium:** hidraulicno ulje po DIN 51524 T1 (ISO TC 131)
- opcija:** opcionalno Buna (NBR) ili Viton (FPM), kao i teflon metalni prsten (PTFE)
- uvrtina:** C-10-3 vidi stranicu broj: [IK-300-109-00](#)
- kuciste:** 3LH-10.-B.. vidi stranicu broj: [IH-300-000-00](#)
- komplet zaptivaca:** SP-MDS-10N-32 (NBR), SP-MDS-10V-32 (FPM)