


**ventil CETOP 7 za ogran. pritiska  
(sendvic ploca) u T, predupravljan  
VSZ-16.-TPS./..**



**Simbol**


**Nazivni pritisak**  
350 bar

**Nazivni protok**  
230 l/min

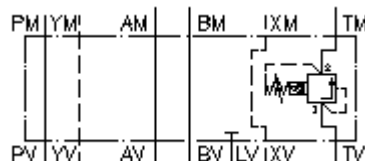

IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-510-552-00**  
(Promjene nisu isključene!)

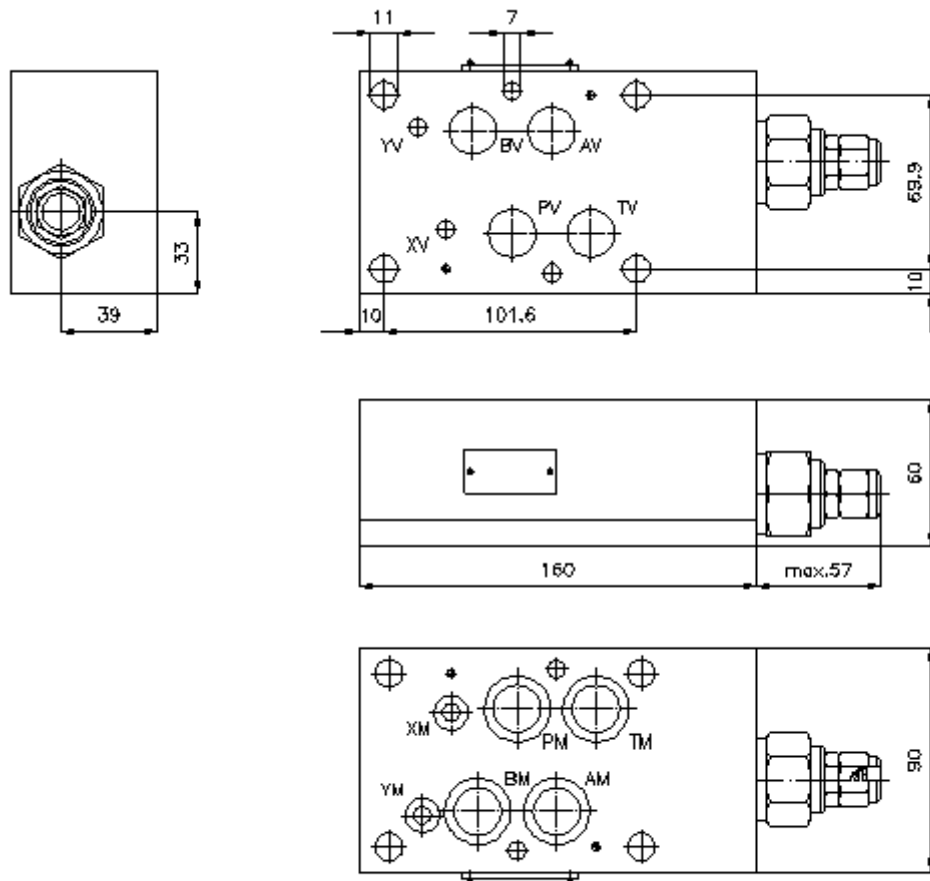

**ventil CETOP 7 za ogran. pritiska  
(sendvic ploca) u T, predupravljan  
VSZ-16.-TPS./..**



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-510-552-00**

(Promjene nisu isključene!)

**Primjer za porudzbu**

VSZ - 16A - T PS C / 30  
| | | | | |  
**A B C D E F**

**Kljuc**

- |  |  |
|--|--|
| <p><b>A izvedba</b><br/>ventil sa ogranicenje pritiska<br/>vrsta podesavanja<br/>predupravljan<br/>pokretni ventil<br/>sa semom po DIN 24340 forma A<br/>izvedba senvic-ploca</p> <p><b>B velicina i materijal</b><br/>16A = aluminim (F37)<br/>16S = celik (9SMnPb28K odnosno GGG-40)</p> | <p><b>C konstrukcija/izvedba</b><br/>T = djelovanje u T</p> <p><b>D ventil za ogranicenje pritiska</b><br/>PS = RVPS-12.-... (predupravljan) vidi<br/>stanicu broj: <a href="#">CP-110-121-00</a></p> <p><b>E vrsta podesavanja</b><br/>C = cep</p> <p><b>F podrucje podesavanja pritiska</b><br/>15 = 3,4 - 105 bar<br/>30 = 3,4 - 210 bar<br/>50 = 3,4 - 350 bar</p> |
|--|--|

**Tehnicke informacije**

- nazivni pritisak:** 250 bar (A)  
350 bar (S)
- nazivni protok:** 230 l/min
- tezina:** 2,2 / 6,2 kg (A/S)
- ventil za ogranicenje  
pritiska:** RVPS-12.-... vidi stranicu broj: [CP-110-121-00](#)
- ukljucujuci:** 4 kom. O-prstena 22.42 x 2.62  
3 kom. O-prstena 9.19 x 2.62