


**dvograni regulator protoka, CETOP 5  
(sendvic ploca) u A+B  
SR2Z-10.-A+BR1.**




**Simbol**

**Nazivni pritisak**  
350 bar



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-650-402-00**  
(Promjene nisu isključene!)

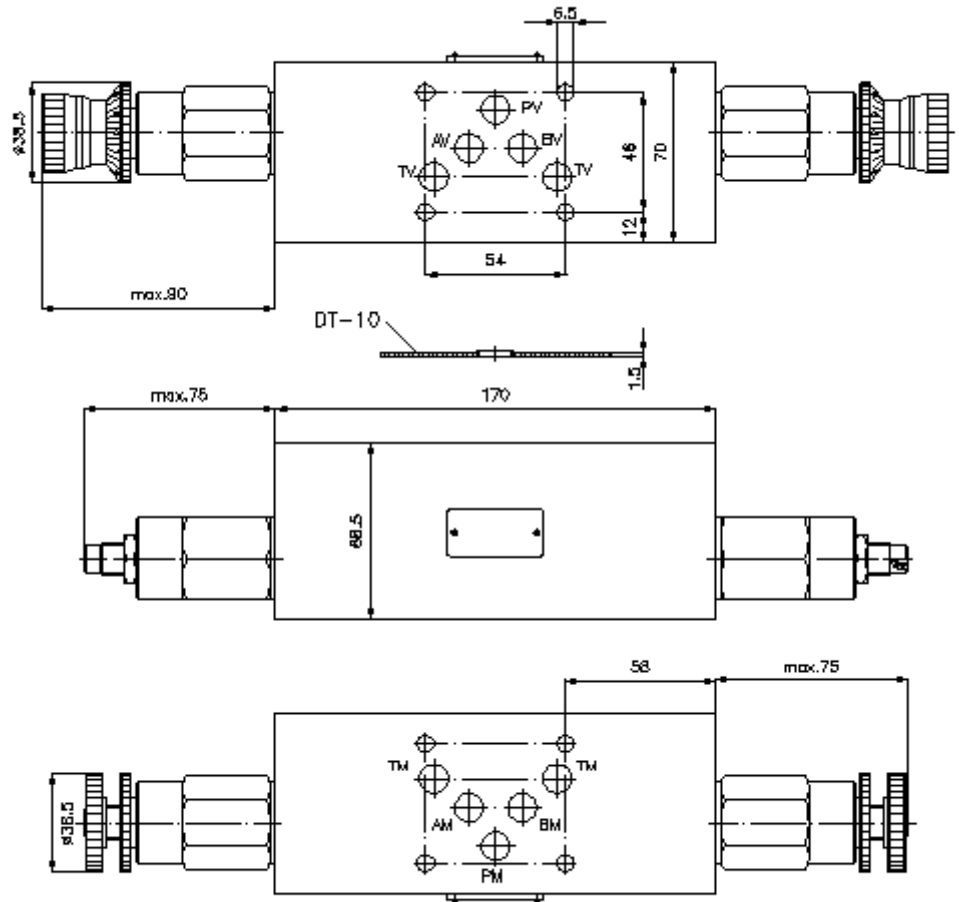

# dvograni regulator protoka, CETOP 5 (sendvic ploca) u A+B SR2Z-10.-A+BR1.



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-650-402-00**

(Promjene nisu isključene!)

## Primjer za porudzbu

SR2Z - 10A - A+B R1 K  
| | | | |  
**A** **B** **C** **D** **E**

## Kljuc

- |   |  |
|---|--|
| <b>A</b> <b>izvedba</b><br>regulator protoka<br>sa zaobilaznim nepovrtnim ventilom<br>sa semom po DIN 24340 forma A<br>izvedba servic-ploca | <b>C</b> <b>konstrukcija/izvedba</b><br>A+B = djelujuci u A i B  |
| <b>B</b> <b>velicina i materijal</b><br>10A = aluminij (F37)<br>10S = celik (9SMnPb28K odnosno GGG-40)                                      | <b>D</b> <b>regulator protoka</b><br>R1 = FAR1-10.-... Vidi stanicu broj: <u>MF-200-101-00</u>             |
|   | <b>E</b> <b>vrsta podesavanja</b><br>S = vreteno sa zavojnicom<br>K = rucni tocak<br>H = sa pomicom skalom |

## Tehnicke informacije

- |                           |  |
|---------------------------|--|
| <b>uputa:</b>             | Regulacija dotoka ili otoka kroz obrtanje ventila oko uzduzene ose |
| <b>nazivni pritisak:</b>  | 250 bar (A)<br>350 bar (S)   |
| <b>tezina:</b>            | 1,6 / 4,9 kg (A/S)   |
| <b>regulator protoka:</b> | FAR1-12.-.-0-.. vidi stanicu broj: <u>MF-200-121-00</u>            |
| <b>ukljucujuci:</b>       | DT-10 = nosac zaptivaca sa intergiranim O-prstenima (Viton FPM)    |