

**usisni ventil CETOP 5  
(sendvic ploca) R 3/4" vanjski  
NSZ-10.-A+B**




IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>


**Simbol**

**Nazivni pritisak**  
350 bar

**Nazivni protok**  
50 l/min



**IZ-190-400-00**  
(Promjene nisu isključene!)

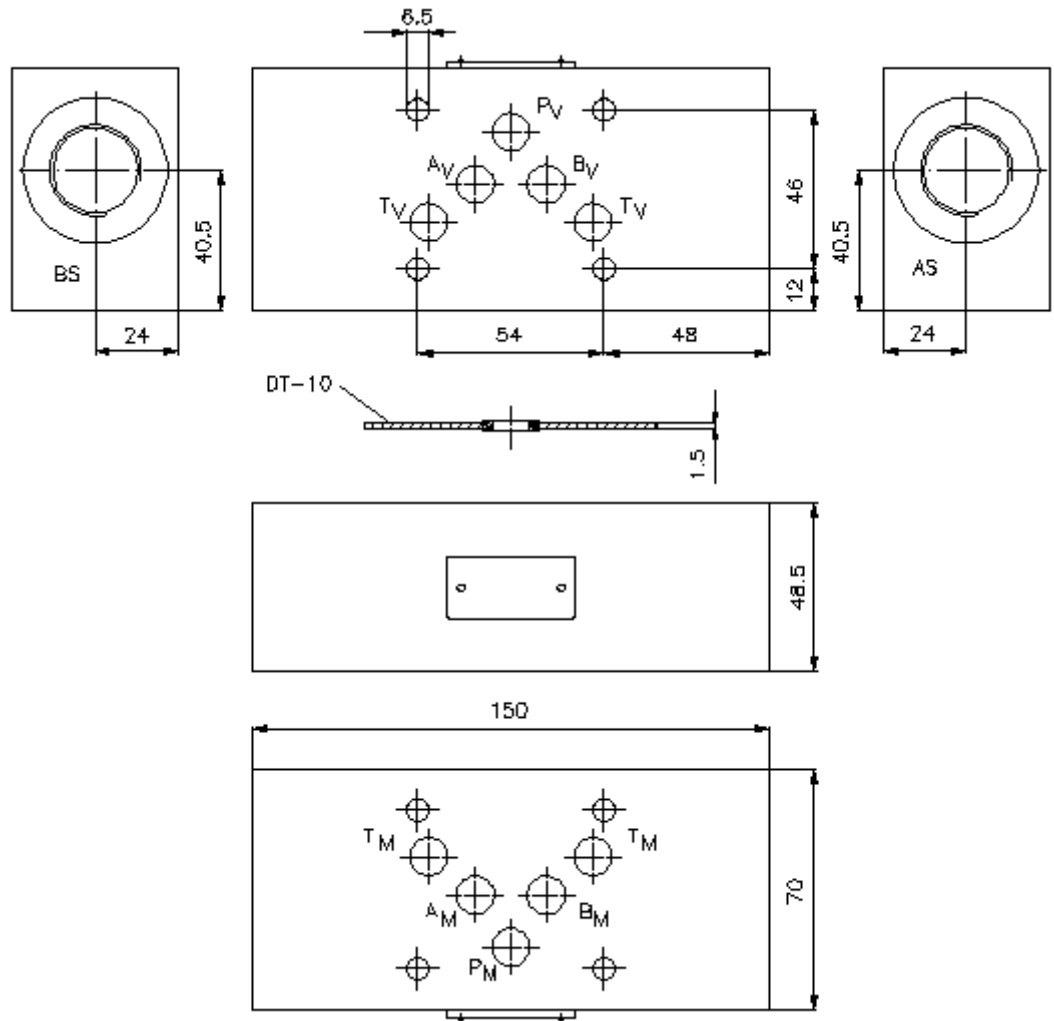

**usisni ventil CETOP 5  
(sendvic ploca) R 3/4" vanjski  
NSZ-10.-A+B**



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-190-400-00**

(Promjene nisu isključene!)

**Primjer za porudzbu**

NSZ - 10A - A+B  
|            |            |  
**A**        **B**        **C**

**Kljuc**

**A** **izvedba**  
usisni ventil  
sa semom po DIN 24340 forma A  
izvedba senvic-ploca

**B** **velicina i materijal**  
10A = aluminum (F37)  
10S = celik (9SMnPb28K odnosno GGG-40)

**C** **konstrukcija/izvedba**  
A+B = djelujuci u A i B

**Tehnicke informacije**

**nazivni pritisak:** 250 bar (A)  
350 bar (S)

**nazivni protok:** 50 l/min

**tezina:** 1,8 / 3,1 kg (A/S)

**otvarajuci pritisak:** 0,2 - 0,3 bar

**nepovratni ventil za ugradnju:** RKVC-10 vidi stranicu broj: IC-210-000-00

**ukljucujuci:** DT-10 = nosac zaptivaca sa intergiranim O-prstenima (Viton FPM)