


**ploca diferencijalnog spoja CETOP 7
(sendvic ploca) u A sa mlaznicom
DSVZ-16S-AS/1.0mm**



Simbol


Nazivni pritisak
350 bar

Nazivni protok
140 l/min



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>


IZ-210-501-00
(Promjene nisu isključene!)

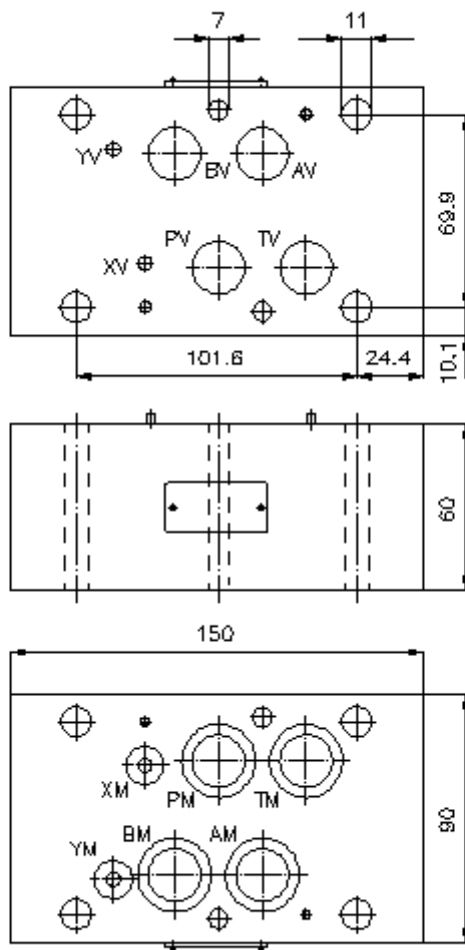

**ploca diferencijalnog spoja CETOP 7
(sendvic ploca) u A sa mlaznicom
DSVZ-16S-AS/1.0mm**

Primjer za porudzbu

DSVZ - 16S - AS/1.0 MM



IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-210-501-00

(Promjene nisu isključene!)

Kljuc

- | | |
|---|---|
| <p>A izvedba
ploca diferencijalnog spoja
sa semom po DIN 24340 forma A
izvedba senvic-ploca</p> | <p>B velicina i materijal
16S = celik (9SMnPb28K odnosno GGG-40)</p> <p>C konstrukcija/izvedba
AS/1.0mm = nepovratni ventil sa blendom
od 1.0 mm u "A" kanalu</p> |
|---|---|

Tehnicke informacije

nazivni pritisak:	350 bar
nazivni protok:	140 l/min
tezina:	5,7 kg
otvarajuci pritisak:	0,2 - 0,3 bar
slobodan protok:	vidi simbol
ukljucujuci:	3 kom. O-prstena 22.22 x 2.62 3 kom. O-prstena 9.19 x 2.62 2 kom. O-prstena 25.00 x 2.50