


**trogr.regulator pritiska, CETOP 7
(sendvic ploca) u P, predupravljan
DMVZ-16.-P02./..**



Simbol




Nazivni pritisak
350 bar

Nazivni protok
150 l/min

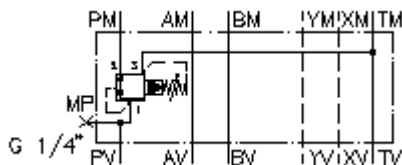

IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-440-500-00
(Promjene nisu isključene!)

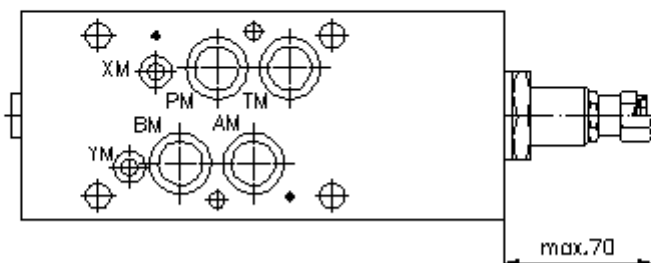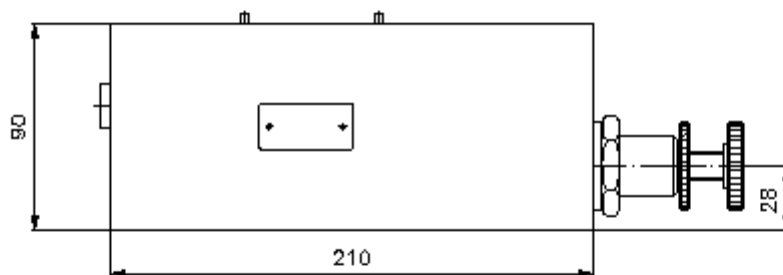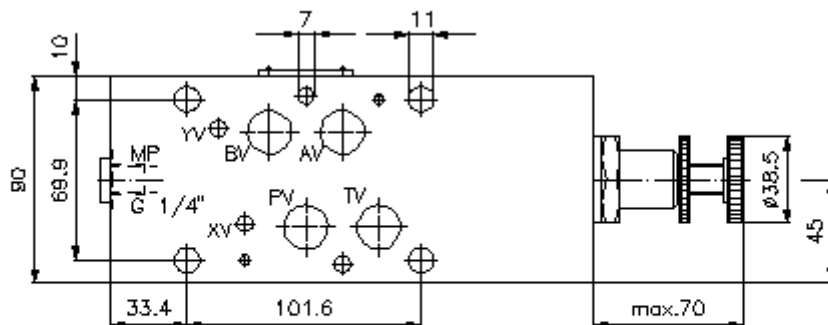

**trogr.regulator pritiska, CETOP 7
(sendvic ploca) u P, predupravljan
DMVZ-16.-P02./..**




IMAV-Hydraulik GmbH
Breite Strasse 10
D-40670 Meerbusch (Osterath)
Telefon +49 (0)2159 - 9188.0
Telefax +49 (0)2159 - 4242
E-mail: info@imav.com
Internet: <http://www.imav.com>

IZ-440-500-00

(Promjene nisu isključene!)

Primjer za porudzbu

DMVZ - 16A - P 02 C / 60



Kljuc

- | | |
|---|--|
| <p>A izvedba
regulator pritiska
vrsta podesavanja
predupravljan
pokretni ventil
sa semom po DIN 24340 forma A
izvedba sendvic-ploca</p> <p>B velicina i materijal
16A = aluminij (F37)
16S = celik (9SMnPb28K odnosno GGG-40)</p> | <p>C konstrukcija/izvedba
P = djelovanje u P</p> <p>D regulator pritiska
02 = PRV2-16.-... (predupravljan) vidi
stranicu broj: MP-240-161-00</p> <p>E vrsta podesavanja
C = cep
K = rucni tocak</p> <p>F stepeni pritiska (PRV2)
30 = 34,5 - 210 bar
60 = 68,9 - 414 bar</p> |
|---|--|

Tehnicke informacije

- | | |
|---|--|
| nazivni pritisak: | 250 bar (A)
350 bar (S) |
| nazivni protok: | 150 l/min |
| tezina: | 4,8 / 13,4 kg (A/S) |
| trograni regulator
pritiska: | PRV2-16.-... vidi stranicu broj: MP-240-161-00 |
| uljucujuci: | 4 kom. O-prstena 22.42 x 2.62
2 kom. O-prstena 9.19 x 2.62 |