


**trogr.prit.vaga,send.ploca CETOP 3  
(sendvic ploca) u B prema T  
SR3Z-06A-BVL.**



**Simbol**


**Nazivni pritisak**  
250 bar

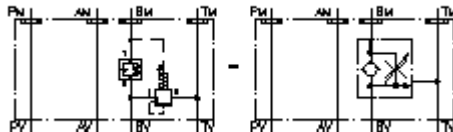

IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-670-250-00**

(Promjene nisu isključene!)

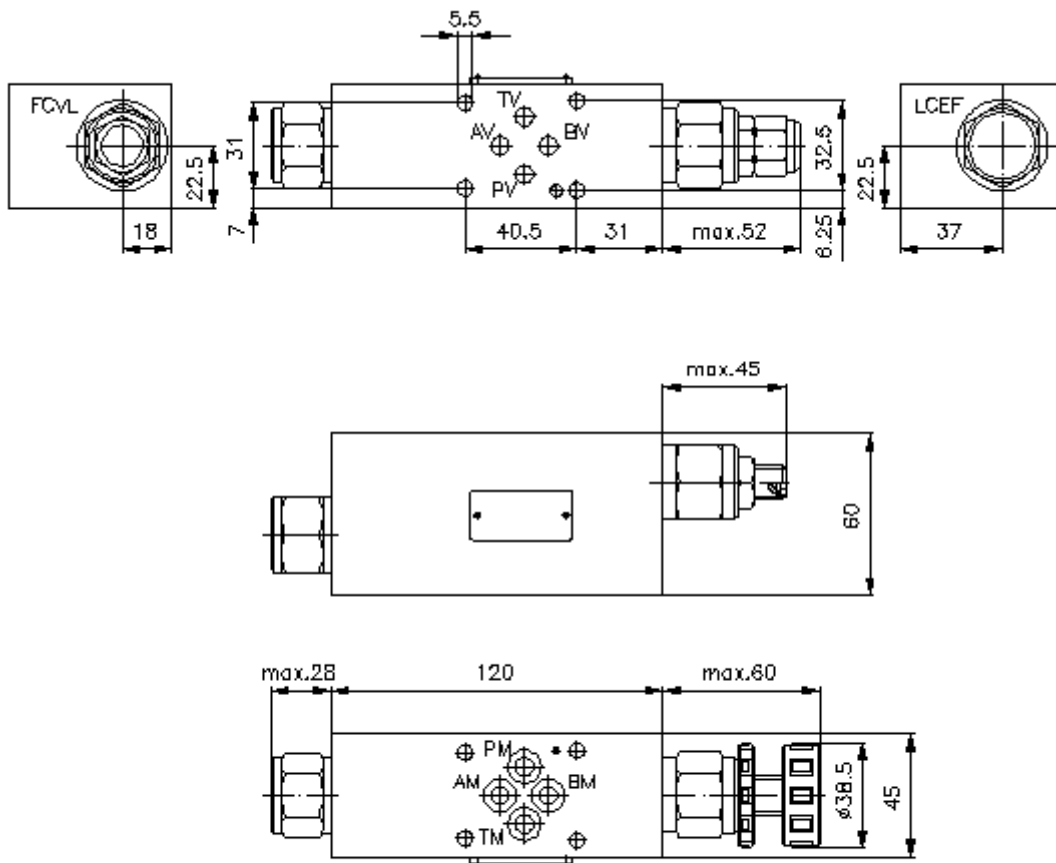

**trogr.prit.vaga,send.ploca CETOP 3  
(sendvic ploca) u B prema T  
SR3Z-06A-BVL.**



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-670-250-00**

(Promjene nisu isključene!)

**Primjer za porudzbu**

SR3Z - 06A - B VL C  
| | | | |  
**A B C D E**

**Kljuc**

- |   |  |
|---|--|
| <p><b>A</b> <b>izvedba</b><br/>regulator protoka<br/>sa semom po DIN 24340 forma A<br/>izvedba senvic-ploca</p> <p><b>B</b> <b>velicina i materijal</b><br/>06A = aluminum (F37)</p> <p><b>C</b> <b>konstrukcija/izvedba</b><br/>B = djelovanje u B (dotok)</p> | <p><b>D</b> <b>prigusni ventil</b><br/>VL = FCVL-10.-..</p> <p><b>E</b> <b>vrsta podesavanja</b><br/>S = vreteno sa zavojnicom<br/>C = cep<br/>K = rucni tocak</p> |
|---|--|

**Tehnicke informacije**

**nazivni pritisak:** 250 bar  
**tezina:** 1, 1 kg  
**dvograni logicki uvrtni ventil:** LCEF-10.-A-F-0-100 vidi stranicu broj: [CD-210-101-00](#)  
**prigusnik sa nepovratnim ventilom:** FCVL-10.-.. vidi stranicu broj: [CF-100-101-00](#)  
**zaptivac:** ukljucujuci:  
4 kom. O-prstena 9.25 x 1.78