

**dvogr.prit.vaga, send.ploca CETOP 5  
(fiksni) u P sa L prikljuckom  
DWMZ-10A-P/10-F-F-...**




IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>




**Simbol**

**Nazivni pritisak**  
250 bar

**Nazivni protok**  
60 l/min

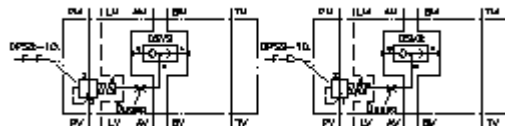

**IZ-710-400-00**  
(Promjene nisu iskljucene!)

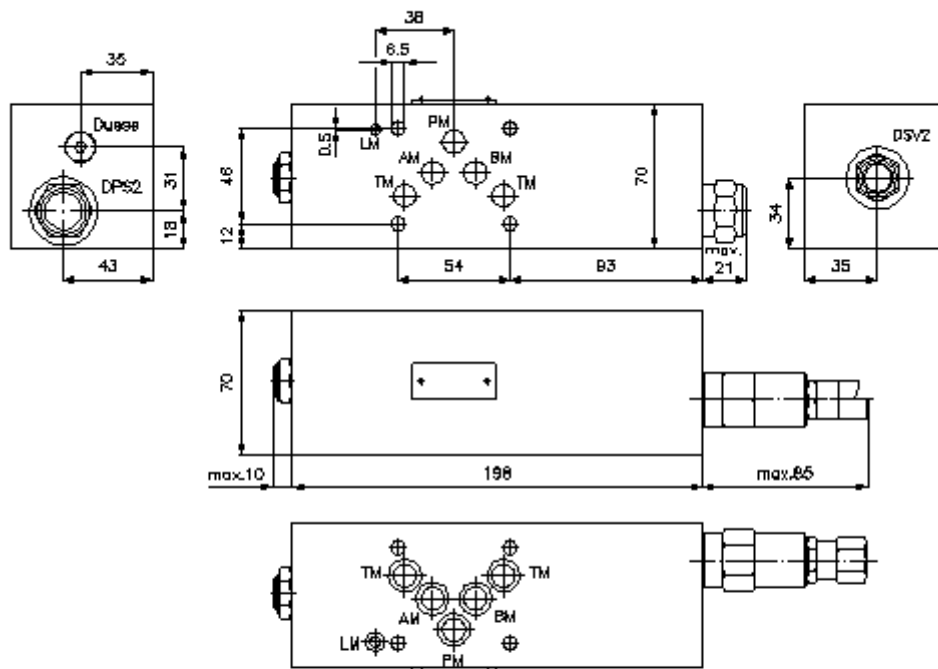

**dvogr.prit.vaga, send.ploca CETOP 5  
(fiksni) u P sa L prikljuckom  
DWMZ-10A-P/10-F-F-...**



IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-710-400-00**

(Promjene nisu isključene!)

**Primjer za porudzbu**

DWMZ - 10A - P / 10 - F - F - 080



**Kljuc**

- |  |  |
|--|--|
| <p><b>A</b> <b>izvedba</b><br/>pritisna vaga<br/>sa semom po DIN 24340 forma A<br/>izvedba senvic-ploca</p> <p><b>B</b> <b>velicina i materijal</b><br/>10A = aluminum (F37)</p> <p><b>C</b> <b>konstrukcija/izvedba</b><br/>P = djelovanje u P</p> <p><b>D</b> <b>kompensator pritiska</b><br/>10 = DPS2-10.-F-..</p> | <p><b>E</b> <b>tip klipa</b><br/>F = regulacija protoka (hidrostaticki)<br/>osnovan pozicija otvorena</p> <p><b>F</b> <b>vrsta podesavanja</b><br/>F = fiksno</p> <p><b>G</b> <b>stepen pritiska (DPS2)</b><br/>080 = 5,5 bar<br/>160 = 11,0 bar</p> |
|--|--|

**Tehnicke informacije**

- nazivni pritisak:** 250 bar
- nazivni protok:** 60 l/min
- tezina:** 2,2 kg
- promjenjivi nepovratni ventil:** DSV2-08.-B-0 vidi stranicu broj: [MC-320-081-00](#)
- dvograni logicki uvrtni ventil:** DPS2-10.-F-.. vidi stranicu broj: [MD-750-101-00](#)
- uljucujuci:** 5 kom. O-prstena 12.42 x 1.78  
1 kom. O-prsten 6.07 x 1.78