

**dvogr.prit.vaga, send.ploca CETOP 5  
(fiksni) u T sa X+Y prikljuckom  
DWMZ-10A-T/16-F-...**




**Simbol**

**Nazivni pritisak**

210 bar

**Nazivni protok**

115 l/min

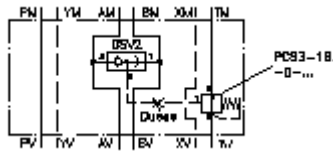

IMAV-Hydraulik GmbH

Breite Strasse 10

D-40670 Meerbusch (Osterath)

Telefon +49 (0)2159 - 9188.0


Telefax +49 (0)2159 - 4242

E-mail: [info@imav.com](mailto:info@imav.com)

Internet: <http://www.imav.com>

**IZ-730-410-00**

(Promjene nisu iskljucene!)

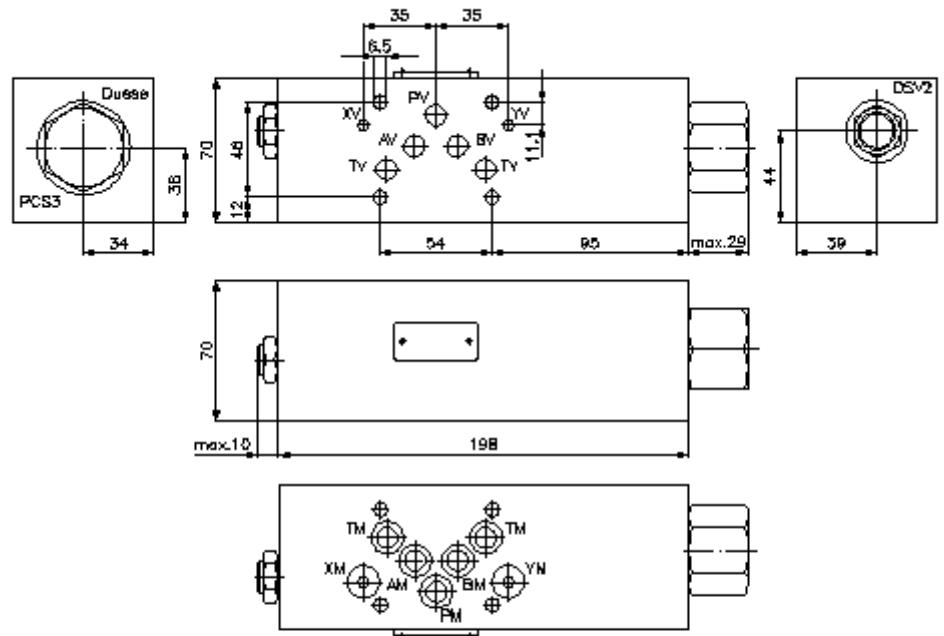

**dvogr.prit.vaga, send.ploca CETOP 5  
(fiksni) u T sa X+Y prikljuckom  
DWMZ-10A-T/16-F-...**




IMAV-Hydraulik GmbH  
Breite Strasse 10  
D-40670 Meerbusch (Osterath)  
Telefon +49 (0)2159 - 9188.0  
Telefax +49 (0)2159 - 4242  
E-mail: [info@imav.com](mailto:info@imav.com)  
Internet: <http://www.imav.com>

**IZ-730-410-00**

(Promjene nisu iskljucene!)

**Primjer za porudzbu**

DWMZ - 10A - T / 16 - F - 080



**Kljuc**

- |   |   |
|---|---|
| <b>A</b> <b>izvedba</b><br>pritisna vaga<br>sa semom po DIN 24340 forma A<br>izvedba servic-ploca | <b>D</b> <b>kompensator pritiska</b><br>16 = DPS2-16.-F-..                                  |
| <b>B</b> <b>velicina i materijal</b><br>10A = aluminum (F37)                                      | <b>E</b> <b>vrsta podesavanja</b><br>F = fiksno   |
| <b>C</b> <b>konstrukcija/izvedba</b><br>T = djelovanje u T  | <b>F</b> <b>stepeni pritiska (PCS3)</b><br>040 = 2,8 bar<br>080 = 5,5 bar<br>160 = 11,0 bar |

**Tehnicke informacije**

- |                                       |  |
|---------------------------------------|--|
| <b>uputa:</b>                         | Mlaznica koje se vidi na simbolu se po potrebi moze ugraditi.<br>Odgovarajuca rupa (prikljucak 1 od PCS3) ima navoj M 6. |
| <b>nazivni pritisak:</b>              | 210 bar  |
| <b>nazivni protok:</b>                | 115 l/min  |
| <b>tezina:</b>                        | 2,8 kg   |
| <b>promjenjivi nepovratni ventil:</b> | DSV2-08.-B-0 vidi stranicu broj: <u>MC-320-081-00</u>  |
| <b>dvograni kompenzator pritiska:</b> | PCS3-16.-0-.. vidi stranicu broj: <u>MF-610-160-00</u>   |
| <b>uljucujuci:</b>                    | 7 kom. O-prstena 12.42 x 1.78  |